




Design: Svein Knudsen / Andrew Smith. Attractive, round wall luminaire with half-diffuser and four slits for indirect light that can be installed both indoors and outdoors. Made of die-cast powder-coated aluminium. Diffuser made of UV-stabilised opal polycarbonate. Two inputs/outputs for cables, option of both visible and concealed cabling, and loopable quick clips. IP65 and vandal-resistant rating IK10.

Tardo



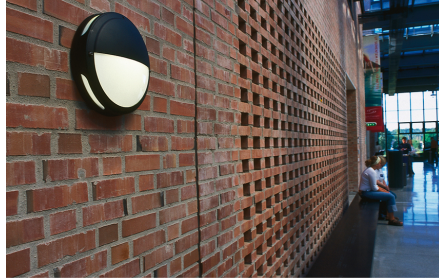


Product- and environment images



Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	633897	Class I	Sensor	Surface, Indoor / Outdoor	Ø325 x D105
	Tardo 2000 Graphite 870lm 3000K	IP65		Screwless terminal block	
	Ra>80 Sensor	IK10			
	14W LED				
	62 lm/W SDCM:3 L70/B50>100,000 Beam: 120°, Direct/Indirect, Opal				
	633896	Class I	Trailing edge	Surface, Indoor / Outdoor	Ø325 x D105
	Tardo 2000 Graphite 870lm 3000K	IP65		Screwless terminal block	
	Ra>80 Trailing edge	IK10			
	14W LED				
	62 lm/W SDCM:3 L70/B50>100,000 Beam: 120°, Direct/Indirect, Opal				
	621897	Class I	Sensor	Surface, Indoor / Outdoor	Ø325 x D105
	Tardo 2000 White 1070lm 3000K	IP65		Screwless terminal block	
	Ra>80 Sensor	IK10			
	14W LED				
	76 lm/W SDCM:3 L70/B50>100,000 Beam: 120°, Direct/Indirect, Opal				