

Uniled IsoSafe Airtight IP65




Attractive downlight for indoor and outdoor use. Certified Airtight from below via membrane between ceiling and downlight ring and mounting directly in insulation. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76–Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief.


Uniled IsoSafe Airtight IP65



Product- and environment images

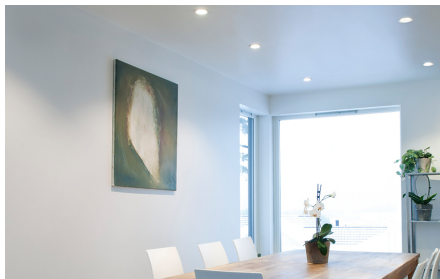

Uniled IsoSafe Airtight IP65

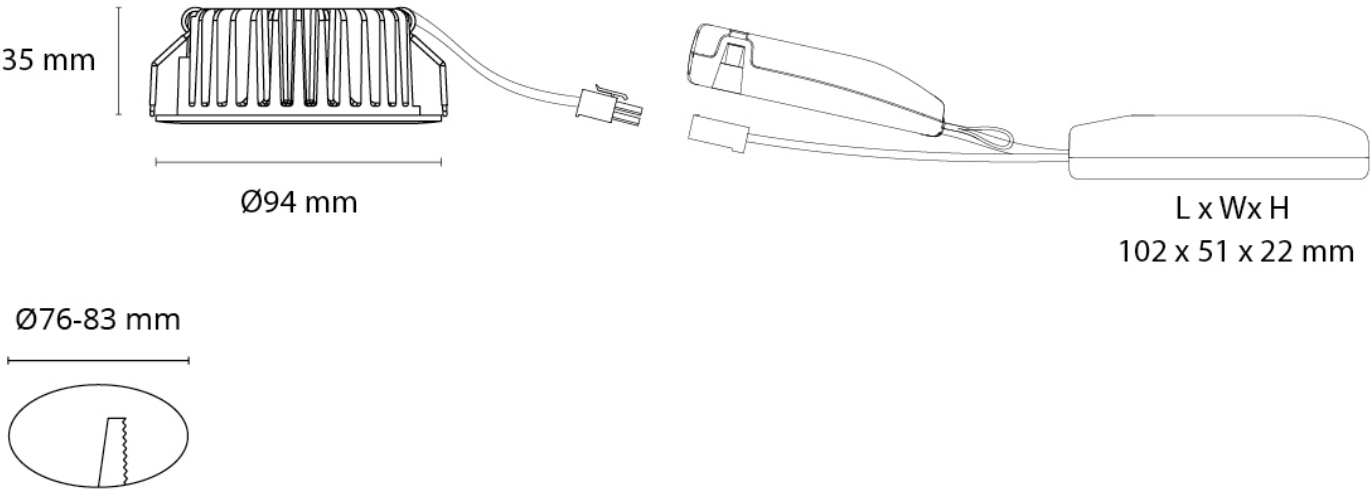

For line drawing dimensions please see each single article codes on next page

Article codes




Article	Protection	Control gear	Mounting/Connection	Dimensions
 904222 UniLED IsoSafe Airtight Brushed steel 610lm 2700K Ra 98 Trailing edge 8.5W LED 72 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H37
 904224 UniLED IsoSafe Airtight Graphite 660lm 2700K Ra 98 Trailing edge 8.5W LED 78 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904221 UniLED IsoSafe Airtight White 670lm 2700K Ra 98 Trailing edge 8.5W LED 79 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904323 UniLED IsoSafe Airtight Black 680lm 3000K Ra 98 Trailing edge 8.5W LED 80 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904322 UniLED IsoSafe Airtight Brushed steel 690lm 3000K Ra 98 Trailing edge 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H37
 904324 UniLED IsoSafe Airtight Graphite 680lm 3000K Ra 98 Trailing edge 8.5W LED 80 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 904321 UniLED IsoSafe Airtight White 690lm 3000K Ra 98 Trailing edge 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904423 UniLED IsoSafe Airtight Black 700lm 4000K Ra 98 Trailing edge 8.5W LED 82 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904422 UniLED IsoSafe Airtight Brushed steel 710lm 4000K Ra 98 Trailing edge 8.5W LED 84 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H37
 904424 UniLED IsoSafe Airtight Graphite 700lm 4000K Ra 98 Trailing edge 8.5W LED 82 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904421 UniLED IsoSafe Airtight White 710lm 4000K Ra 98 Trailing edge 8.5W LED 84 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class II SELV IP65/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
Accessories				
 820090 Emergencybox Adapter kit for downlight	L250 x W13 x H13			



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35