

Uniled IsoSafe Blade



Attractive downlight for indoor and outdoor use. Certified Airtight from below via membrane between ceiling and downlight ring and mounting directly in insulation. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76–Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP54, KL II.

Uniled IsoSafe Blade




Product- and environment images




Uniled IsoSafe Blade



35 mm

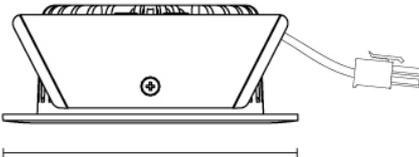


Ø94 mm

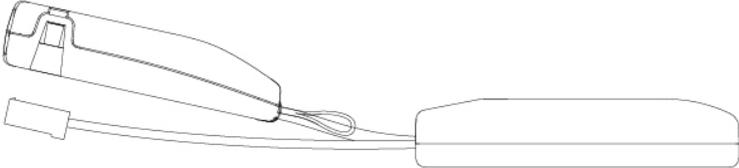

L x W x H
102 x 51 x 22 mm

83 mm



For line drawing dimensions please see each single article codes on next page

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>904333 UniLED IsoSafe Blade Black 680lm 3000K Ra 98 Trailing edge 8.5W LED 80 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP54/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 <p>904332 UniLED IsoSafe Blade Brushed steel 690lm 3000K Ra 98 Trailing edge 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP54/IP20	Trailing edge	Recessed, Indoor Screwless terminal block	Ø94 x H37
 <p>904331 UniLED IsoSafe Blade White 690lm 3000K Ra 98 Trailing edge 8.5W LED 81 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP54/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
Accessories				
 <p>820090 Emergencybox Adapter kit for downlight</p>				L250 x W13 x H13
 <p>8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</p>				L270 x W75 x H35