

Uniled IsoSafe DimToWarm



Attractive downlight for indoor and outdoor use. Mounted directly in concrete via the special blade spring system. Well integrated LED chip, dimmable via phase-dimming or DALI driver (not IsoSafe). Made of die-cast powder-coated aluminium or brushed steel (only indoors), glass diffuser. 42-degree scattering angle via reflector. 35 mm in total height, Flexible hole dimensions Ø76-Ø83. Tool-free mounting in mounting box for direct 230 V with loopable quick clips and automatic strain relief. IP54, KL II


Uniled IsoSafe DimToWarm



Product- and environment images



Uniled IsoSafe DimToWarm

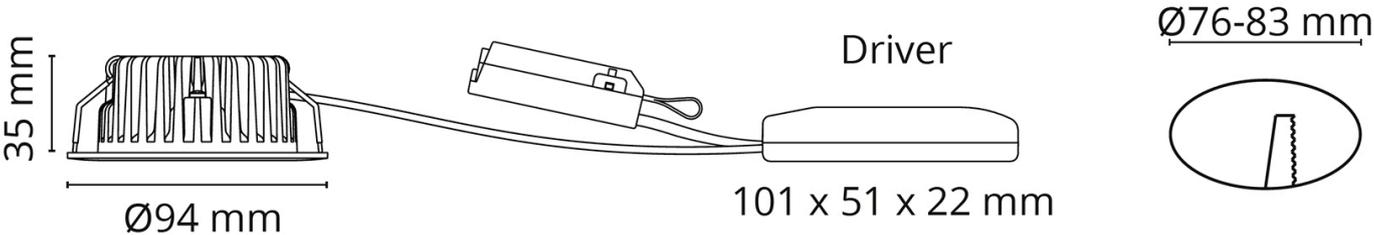

For line drawing dimensions please see each single article codes on next page

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>904211 UniLED IsoSafe DimToWarm White 560lm 2000-2800K Ra>95 Trailing edge 7.3W LED 77 lm/W SDCM:3 L90/B10>50,000 Beam: 42°, Direct, Reflector</p>	Class II SELV IP54/IP20	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
Accessories				
 <p>9143 Rehab Ring Black 133mm for Junistar, Uniled, Soft & Jupiter</p>				Ø133 x H4
 <p>9236 Rehab Ring Black 180mm for Junistar, Uniled, Soft & Jupiter</p>				Ø180 x H45
 <p>9973 Rehab Ring Brushed steel 133mm for Junistar, Uniled, Soft & Jupiter</p>				Ø133 x H4
 <p>9233 Rehab Ring Graphite 133mm for Junistar, Uniled, Soft & Jupiter</p>				Ø133 x H4
 <p>9234 Rehab Ring Graphite 180mm for Junistar, Uniled, Soft & Jupiter</p>				Ø180 x H45
 <p>9327 Rehab Ring Graphite 250mm for Junistar, Uniled, Soft & Jupiter</p>				Ø250 x H45
 <p>9223 Rehab Ring White 133mm for Junistar, Uniled, Soft & Jupiter</p>				Ø133 x H4
 <p>9224 Rehab Ring White 180mm for Junistar, Uniled, Soft & Jupiter</p>				Ø180 x H45
 <p>9227 Rehab Ring White 250mm for Junistar, Uniled, Soft & Jupiter</p>				Ø250 x H45
 <p>820090 Emergencybox Adapter kit for downlight</p>				L250 x W13 x H13

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35