




Small downlight with polished reflector for windows, cabinets and niches to give a nice moodful light.

Nano is available at 15 or 36 degrees. Delivered without driver. Nanodriver (optional) with max 9W dimmed with 1-10V / Impuls DIM, max 17W dimmed with Trailing edge dimming / Impuls DIM and max 4,2W dimmed with Trailing edge dimming.

Product- and environment images

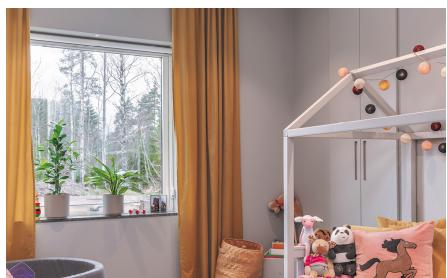

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	907006 Nano Black 80lm 2700K Ra>90 Driver 350mA ordered separately 1W LED 80 lm/W SDCM:3 L70/B50>50,000 Beam: 36°, Direct, Reflector medium	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
	907001 Nano White 80lm 2700K Ra>90 Driver 350mA ordered separately 1W LED 80 lm/W SDCM:3 L70/B50>50,000 Beam: 15°, Direct, Reflector spot	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
	907003 Nano White 80lm 2700K Ra>90 Driver 350mA ordered separately 1W LED 80 lm/W SDCM:3 L70/B50>50,000 Beam: 36°, Direct, Reflector medium	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
	907007 Nano Black 90lm 3000K Ra>90 Driver 350mA ordered separately 1W LED 90 lm/W SDCM:3 L70/B50>50,000 Beam: 36°, Direct, Reflector medium	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
	907002 Nano White 90lm 3000K Ra>90 Driver 350mA ordered separately 1W LED 90 lm/W SDCM:3 L70/B50>50,000 Beam: 15°, Direct, Reflector spot	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
	907004 Nano White 90lm 3000K Ra>90 Driver 350mA ordered separately 1W LED 90 lm/W SDCM:3 L70/B50>50,000 Beam: 36°, Direct, Reflector medium	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	907005 Nano White 90lm 4000K Ra>90 Driver 350mA ordered separately 1W LED 90 lm/W SDCM:3 L70/B50>50,000 Beam: 36°, Direct, Reflector medium	Class III IP44	Driver 350mA ordered separately	Recessed, Indoor	Ø33 x H27
Drivers					
	820078 Nano White Driver 4,2W 350mA Trailing edge	IP20	Trailing edge	Indoor	Ø23 x L90 x W23 x H19
	820091 Nano White Driver 17W 350mA Trailing edge / Push Dim 17W	IP20	Trailing edge / Push Dim	Indoor	L166 x W46 x H34