




Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Dimmable using a DALI or phase control dimmer. We recommend LEDDim 400 and LEDDim Smart. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Also supplied with a sensor and/or emergency light.

Product- and environment images

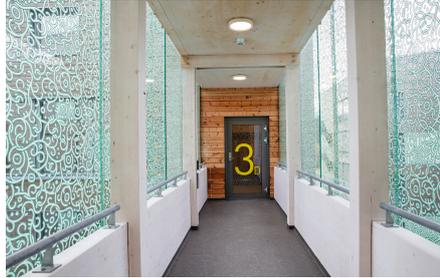

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>606049  <b>Disc 290 Black 1770lm 2700K Ra&gt;80</b>  <b>DALI-2 / Push Dim</b>  <b>17W LED</b>            104 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606043  <b>Disc 290 Black 1860lm 2700K Ra&gt;80</b>  <b>Trailing edge</b>  <b>17W LED</b>            109 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606040  <b>Disc 290 White 1900lm 2700K</b>  <b>Ra&gt;80 DALI-2 / Push Dim</b>  <b>17W LED</b>            112 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606037  <b>Disc 290 White 2000lm 2700K</b>  <b>Ra&gt;80 Sensor Dim</b>  <b>17W LED</b>            118 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Sensor Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606034  <b>Disc 290 White 2000lm 2700K</b>  <b>Ra&gt;80 Trailing edge</b>  <b>17W LED</b>            118 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606050  <b>Disc 290 Black 1900lm 3000K Ra&gt;80</b>  <b>DALI-2 / Push Dim</b>  <b>17W LED</b>            112 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>606047  <b>Disc 290 Black 1900lm 3000K Ra&gt;80</b>  <b>Sensor Dim</b>  <b>17W LED</b>            112 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Sensor Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606044  <b>Disc 290 Black 1900lm 3000K Ra&gt;80</b>  <b>Trailing edge</b>  <b>17W LED</b>            112 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606041  <b>Disc 290 White 2050lm 3000K</b>  <b>Ra&gt;80 DALI-2 / Push Dim</b>  <b>17W LED</b>            121 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606038  <b>Disc 290 White 2050lm 3000K</b>  <b>Ra&gt;80 Sensor Dim</b>  <b>17W LED</b>            121 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Sensor Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606035  <b>Disc 290 White 2050lm 3000K</b>  <b>Ra&gt;80 Trailing edge</b>  <b>17W LED</b>            121 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606051  <b>Disc 290 Black 2030lm 4000K Ra&gt;80</b>  <b>DALI-2 / Push Dim</b>  <b>17W LED</b>            119 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>606045  <b>Disc 290 Black 2030lm 4000K Ra&gt;80</b>  <b>Trailing edge</b>  <b>17W LED</b>                      119 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606042  <b>Disc 290 White 2180lm 4000K</b>  <b>Ra&gt;80 DALI-2 / Push Dim</b>  <b>17W LED</b>                      128 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606039  <b>Disc 290 White 2180lm 4000K</b>  <b>Ra&gt;80 Sensor Dim</b>  <b>17W LED</b>                      128 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Sensor Dim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606036  <b>Disc 290 White 2180lm 4000K</b>  <b>Ra&gt;80 Trailing edge</b>  <b>17W LED</b>                      128 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Beam: 85°, Direct, Opalprism</p>	<b>Class II</b> <b>IP20</b> <b>IK10</b>	Trailing edge	Surface, Indoor Screwless terminal block	Ø288 x H55
<b>Accessories</b>				
 <p>606095  <b>Disc/Frosta Black Pendant Adapter</b></p>				L5000 x W102 x H22
 <p>606094  <b>Disc/Frosta White Pendant Adapter</b></p>				L5000 x W102 x H22
 <p>820307  <b>Emergency battery 3 Hours 3.0Ah - Model No: B093</b></p>				L137 x W27 x H27