


Disc 285x285





Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Dimmable using a DALI or phase control dimmer. We recommend LEDDim 400 and LEDDim Smart. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Also supplied with a sensor and/or emergency light.

Disc 285x285

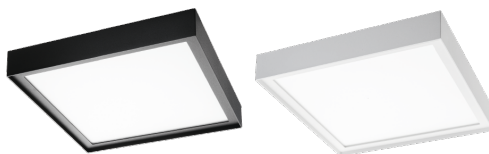

Product- and environment images

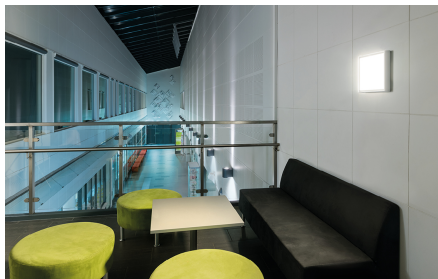

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606075 Disc 285X285 Black 2000lm 2700K Ra>80 DALI-2 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606080 • Disc 285X285 Black 2000lm 2700K Ra>80 Emergency 3H/trailing edge 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Emergency 3H/trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606072 • Disc 285X285 Black 2000lm 2700K Ra>80 Sensor Dim 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606069 Disc 285X285 Black 2000lm 2700K Ra>80 Trailing edge 20W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606058 • Disc 285X285 White 2080lm 2700K Ra>80 DALI-2 / Push Dim 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606063 • Disc 285X285 White 2080lm 2700K Ra>80 Emergency 3H/trailing edge 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Emergency 3H/trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606055 • Disc 285X285 White 2080lm 2700K Ra>80 Sensor Dim 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606052 Disc 285X285 White 2080lm 2700K Ra>80 Trailing edge 22W LED 95 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606076 Disc 285X285 Black 2100lm 3000K Ra>80 DALI-2 / Push Dim 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606081 • Disc 285X285 Black 2100lm 3000K Ra>80 Emergency 3H/trailing edge 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Emergency 3H/trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606070 Disc 285X285 Black 2100lm 3000K Ra>80 Trailing edge 20W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606059 Disc 285X285 White 2280lm 3000K Ra>80 DALI-2 / Push Dim 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606064 [•] Disc 285X285 White 2280lm 3000K Ra>80 Emergency 3H/trailing edge 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Emergency 3H/trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606056 Disc 285X285 White 2190lm 3000K Ra>80 Sensor Dim 22W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	L283 x W283 x H55
 606053 Disc 285X285 White 2280lm 3000K Ra>80 Trailing edge 20W LED 114 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	L283 x W283 x H55
Accessories				
 606095 Disc/Frosta Black Pendant Adapter				L5000 x W102 x H22
 606094 Disc/Frosta White Pendant Adapter				L5000 x W102 x H22
 820307 Emergency battery 3 Hours 3.0Ah - Model No: B093				L137 x W27 x H27

[•] = This article is produced by order, with an expected delivery time of 3-4 weeks.