




Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Dimmable using a DALI or phase control dimmer. We recommend LEDDim 400 and LEDDim Smart. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Also supplied with a sensor and/or emergency light.

Product- and environment images

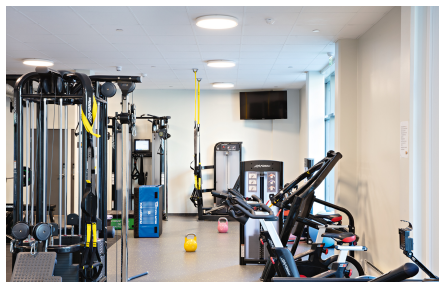

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606017 Disc 480 Black 3140lm 2700K Ra>80 Trailing edge 31W LED 101 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55
 606000 Disc 480 White 3410lm 2700K Ra>80 Trailing edge 31W LED 110 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55
 606024 Disc 480 Black 3390lm 3000K Ra>80 DALI-2 30W LED 113 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2	Surface, Indoor Screwless terminal block	Ø470 x H55
 606021 Disc 480 Black 3390lm 3000K Ra>80 Sensor Dim 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606018 Disc 480 Black 3390lm 3000K Ra>80 Trailing edge 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55
 606007 Disc 480 White 3680lm 3000K Ra>80 DALI-2 / Push Dim 30W LED 123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø470 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606004 Disc 480 White 3680lm 3000K Ra>80 Sensor Dim 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606001 Disc 480 480 White 3680lm 3000K Ra>80 Trailing edge 31W LED 119 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55
 606019 Disc 480 Black 3490lm 4000K Ra>80 Trailing edge 31W LED 113 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55
 606008 Disc 480 White 3790lm 4000K Ra>80 DALI-2 / Push Dim 30W LED 126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	DALI-2 / Push Dim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606005 Disc 480 White 3790lm 4000K Ra>80 Sensor Dim 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Sensor Dim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606002 Disc 480 480 White 3790lm 4000K Ra>80 Trailing edge 31W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Trailing edge	Surface, Indoor Screwless terminal block	Ø470 x H55

Accessories

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
	606095			L5000 x W102 x H22
	Disc/Frosta Black Pendant Adapter			
	606094			L5000 x W102 x H22
	Disc/Frosta White Pendant Adapter			
	820307			L137 x W27 x H27
	Emergency battery 3 Hours 3.0Ah - Model No: B093			