

# Disc 290 TW




Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Tunable White LEDDim.

# Disc 290 TW



## Product- and environment images

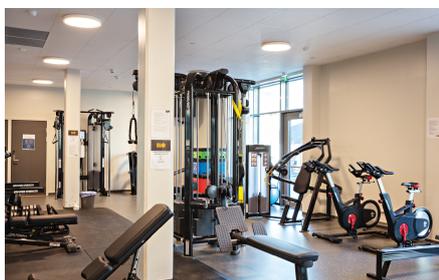

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>606119  <b>Disc 290 TW Black 1840lm</b>  <b>(@4000K) 2000-4000K Ra&gt;80 TW</b>  <b>LEDDim</b>  <b>19W LED</b>            97 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW LEDDim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606118  <b>Disc 290 TW White 1910lm</b>  <b>(@4000K) 2000-4000K Ra&gt;80 TW</b>  <b>LEDDim</b>  <b>19W LED</b>            101 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW LEDDim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606088  <b>Disc 290 TW Black 1740lm</b>  <b>(@6500K) 2700-6500K Ra&gt;80 TW</b>  <b>DALI Type 8</b>  <b>17W LED</b>            102 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW DALI Type 8	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606089  <b>Disc 290 TW Black 1740lm</b>  <b>(@6500K) 2700-6500K Ra&gt;80 TW</b>  <b>LEDDim</b>  <b>19W LED</b>            92 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW LEDDim	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606086  <b>Disc 290 TW White 1890lm</b>  <b>(@6500K) 2700-6500K Ra&gt;80 TW</b>  <b>DALI Type 8</b>  <b>17W LED</b>            111 lm/W SDCM:3            L80/B20&gt;100,000, L90&gt;50,000            Beam: 85°, Direct, Opalprism</p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW DALI Type 8	Surface, Indoor Screwless terminal block	Ø288 x H55
 <p>606087  <b>Disc 290 TW White 1890lm</b>  <b>(@6500K) 2700-6500K Ra&gt;80 TW</b>  <b>LEDDim</b>  <b>19W LED</b></p>	<b>Class II</b>  <b>IP20</b>  <b>IK10</b>	TW LEDDim	Surface, Indoor Screwless terminal block	Ø288 x H55
<b>Accessories</b>				

# Article codes



Article	99 lm/W SDCM:3	Protection	Control gear	Mounting/Connection	Dimensions
 L80/B20 > 100,000, L80 > 50,000 Beam: 85°, Direct, Anaprism	606093				L5000 x W102 x H22
	606094				L5000 x W102 x H22