

Disc 480 TW




Energy efficient surface-mounted LED luminaire with a slim profile ensuring a modern look. Square and round available in multiple sizes and lumens. Opalprismatic diffuser provides a glare-free light. The luminaire is produced in a matt black or white powder-coated aluminium finish. Simple installation with quick connections between fixture and back plate that can be screwed straight onto all known ceiling boxes. Visible cabling also possible. Tunable White LEDDim or DALI Type 8.

Disc 480 TW



Product- and environment images

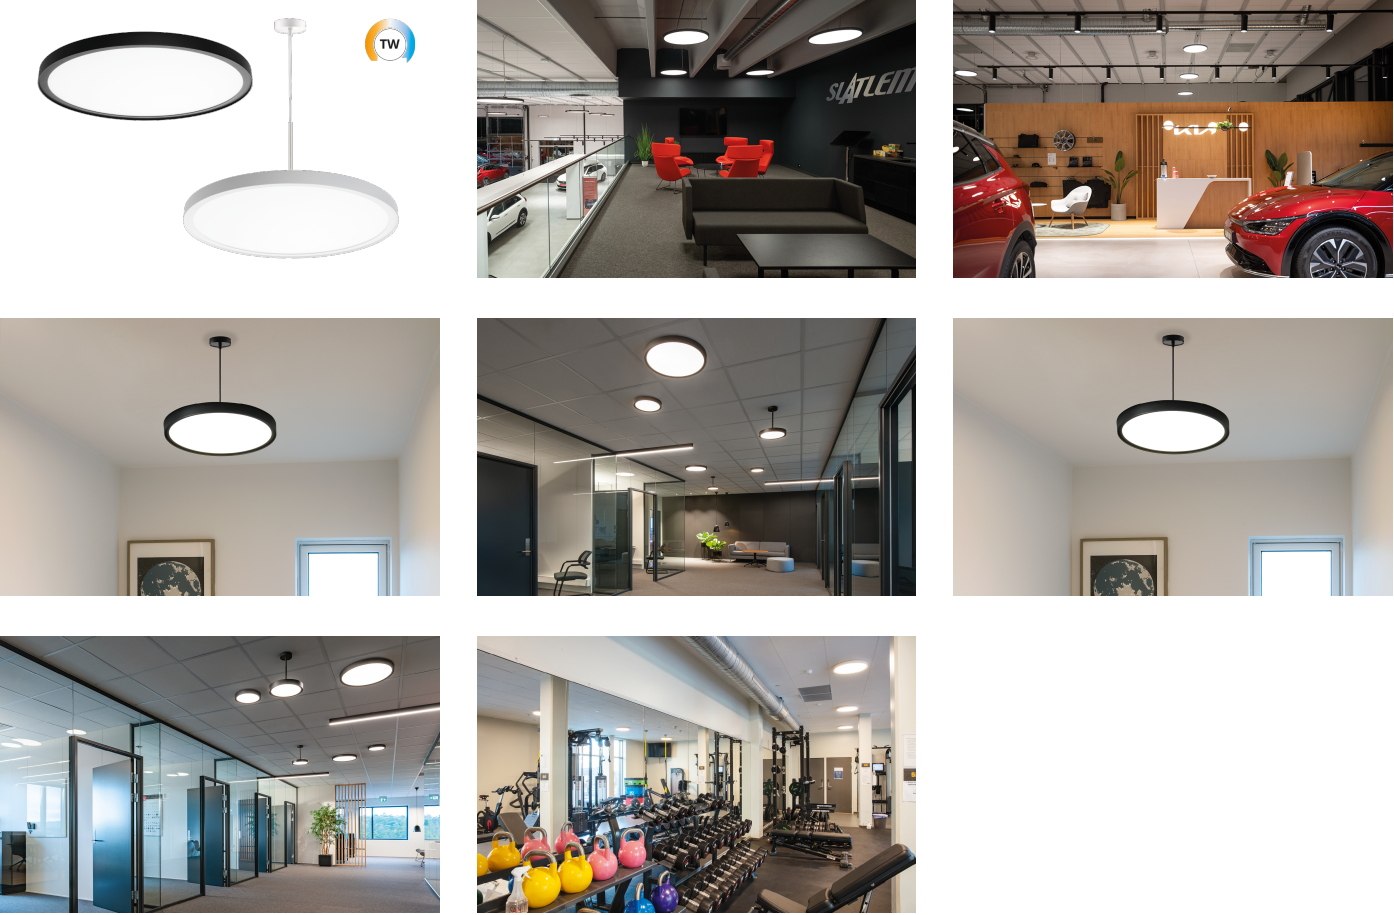

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606117 Disc 480 TW Black 3790lm (@4000K) 2000-4000K Ra>80 TW LEDDim 36W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	TW LEDDim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606116 Disc 480 TW White 3900lm (@4000K) 2000-4000K Ra>80 TW LEDDim 36W LED 108 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	TW LEDDim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606026 Disc 480 TW Black 3470lm (@6500K) 2700-6500K Ra>80 TW DALI Type 8 36W LED 96 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	TW DALI Type 8	Surface, Indoor Screwless terminal block	Ø470 x H55
 606027 Disc 480 TW Black 3470lm (@6500K) 2700-6500K Ra>80 TW LEDDim 36W LED 96 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	TW LEDDim	Surface, Indoor Screwless terminal block	Ø470 x H55
 606009 Disc 480 TW White 3720lm(@6500K) 2700-6500K Ra>80 TW DALI Type 8 30W LED 124 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	TW DALI Type 8	Surface, Indoor Screwless terminal block	Ø470 x H55
 606010 Disc 480 TW White 3720lm(@6500K) 2700-6500K Ra>80 TW LEDDim 30W LED 124 lm/W SDCM:3 L80/B20>100,000, L90>50,000	Class II IP20 IK10	TW LEDDim	Surface, Indoor Screwless terminal block	Ø470 x H55
Accessories	124 lm/W SDCM:3 L80/B20>100,000, L90>50,000			

Article codes



Article	Beam: 85°, Direct, Opalprism	Protection	Control gear	Mounting/Connection	Dimensions
	606095				L5000 x W102 x H22
	Disc/Frosta Black Pendant Adapter				
	606094				L5000 x W102 x H22
	Disc/Frosta White Pendant Adapter				
	820307				L137 x W27 x H27
	Emergency battery 3 Hours 3.0Ah - Model No: B093				