

Cube Lux




Surface-mounted downlight for indoor and outdoor use (beneath eaves). Cube Lux emits a harmonious, non-flickering light with excellent colour rendering. Its patented, adjustable 30-degree tilt function in all directions is covered by a 10-year warranty. Simple installation with quick connection between housing and ceiling mounting plate: the luminaire snaps into place and is attached using hidden screws

Cube Lux



Product- and environment images

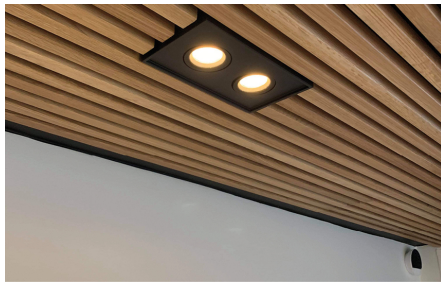

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 902545 Cube Lux Black 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L132 x W132 x H65
 902554 Cube Lux Black 2X 1160lm 2700K Ra 98 Trailing edge 16W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L231 x W132 x H65
 902539 Cube Lux White 580lm 2700K Ra 98 Trailing edge 8W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L132 x W132 x H65
 902548 Cube Lux White 2X 1160lm 2700K Ra 98 Trailing edge 16W LED 73 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L231 x W132 x H65
 902546 Cube Lux Black 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L132 x W132 x H65
 902555 Cube Lux Black 2X 1180lm 3000K Ra 98 Trailing edge 16W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L231 x W132 x H65

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 902540 Cube Lux White 590lm 3000K Ra 98 Trailing edge 8W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L132 x W132 x H65
 902549 Cube Lux White 2X 1180lm 3000K Ra 98 Trailing edge 16W LED 74 lm/W SDCM:1 L90/B10>100,000 Beam: 42°, Direct, Reflector	Class I IP21	Trailing edge	Indoor / Outdoor Screwless terminal block	L231 x W132 x H65