




Artes Midi is a decorative and stylish outdoor luminaire for wall mounting. It is possible to make an individual gradual adjustment of the light angle/light distribution up and down. Made of die-cast, powder-coated aluminium. Dimmable with phase control dimmer. We recommend LEDDim and LEDDim Smart. Easy installation with wall bracket together with quick clips and two cable inputs.

## Product- and environment images

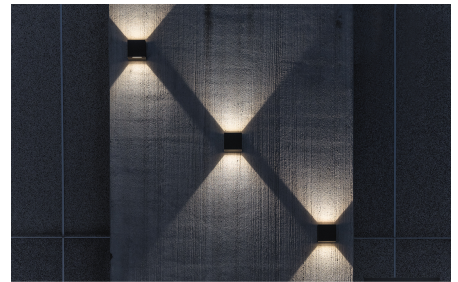

# Article codes



| Article                                                                             |                                                                                                                                                                                                                   | Protection                                                   | Control gear         | Mounting/Connection                                           | Dimensions         |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------|----------------------|---------------------------------------------------------------|--------------------|
|    | <p>641715</p> <p><b>Artes Midi Black 980lm 2700K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>31 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p>     | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |
|    | <p>641712</p> <p><b>Artes Midi Graphite 960lm 2700K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>30 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p>  | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |
|    | <p>641709</p> <p><b>Artes Midi White 1560lm 2700K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>49 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p>    | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |
|  | <p>641716</p> <p><b>Artes Midi Black 1030lm 3000K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>32 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p>    | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |
|  | <p>641713</p> <p><b>Artes Midi Graphite 1010lm 3000K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>32 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p> | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |
|  | <p>641710</p> <p><b>Artes Midi White 1640lm 3000K</b></p> <p><b>Ra&gt;80 Trailing edge</b></p> <p><b>32W LED</b></p> <p>51 lm/W SDCM:3</p> <p>L70/B10&gt;100,000, L80/B50&gt;80,000</p> <p>Beam: 60°, Lens</p>    | <p><b>Class II</b></p> <p><b>IP65</b></p> <p><b>IK10</b></p> | <p>Trailing edge</p> | <p>Wall, Indoor / Outdoor</p> <p>Screwless terminal block</p> | L205 x W205 x H125 |

# Article codes



| Article                                                                           |                                                                      | Protection      | Control gear  | Mounting/Connection      | Dimensions         |
|-----------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|---------------|--------------------------|--------------------|
|  | 641717                                                               | <b>Class II</b> | Trailing edge | Wall, Indoor / Outdoor   | L205 x W205 x H125 |
|                                                                                   | <b>Artes Midi Black 1100lm 4000K</b>                                 | <b>IP65</b>     |               | Screwless terminal block |                    |
|                                                                                   | <b>Ra&gt;80 Trailing edge</b>                                        | <b>IK10</b>     |               |                          |                    |
|                                                                                   | <b>32W LED</b>                                                       |                 |               |                          |                    |
|                                                                                   | 34 lm/W SDCM:3<br>L70/B10>100,000, L80/B50>80,000<br>Beam: 60°, Lens |                 |               |                          |                    |
|  | 641714                                                               | <b>Class II</b> | Trailing edge | Wall, Indoor / Outdoor   | L205 x W205 x H125 |
|                                                                                   | <b>Artes Midi Graphite 1080lm 4000K</b>                              | <b>IP65</b>     |               | Screwless terminal block |                    |
|                                                                                   | <b>Ra&gt;80 Trailing edge</b>                                        | <b>IK10</b>     |               |                          |                    |
|                                                                                   | <b>32W LED</b>                                                       |                 |               |                          |                    |
|                                                                                   | 34 lm/W SDCM:3<br>L70/B10>100,000, L80/B50>80,000<br>Beam: 60°, Lens |                 |               |                          |                    |
|  | 641711                                                               | <b>Class II</b> | Trailing edge | Wall, Indoor / Outdoor   | L205 x W205 x H125 |
|                                                                                   | <b>Artes Midi White 1760lm 4000K</b>                                 | <b>IP65</b>     |               | Screwless terminal block |                    |
|                                                                                   | <b>Ra&gt;80 Trailing edge</b>                                        | <b>IK10</b>     |               |                          |                    |
|                                                                                   | <b>32W LED</b>                                                       |                 |               |                          |                    |
|                                                                                   | 55 lm/W SDCM:3<br>L70/B10>100,000, L80/B50>80,000<br>Beam: 60°, Lens |                 |               |                          |                    |