

Bardo IsoSafe Airtight




Apparecchio IP65 per applicazioni interne ed esterne, adatto per l'installazione nei bagni Volume 1. Tenuta all'aria garantita grazie a una membrana posta tra il soffitto e la cornice dell'apparecchio, con possibilità di installazione direttamente nell'isolamento (ISOSAFE / BBC RT 2012). Alimentazione elettronica remota di 1,20 metri (cavo in dotazione). Nessun attrezzo necessario per l'installazione, grazie al connettore a sgancio rapido.


Bardo IsoSafe Airtight



Product- and environment images

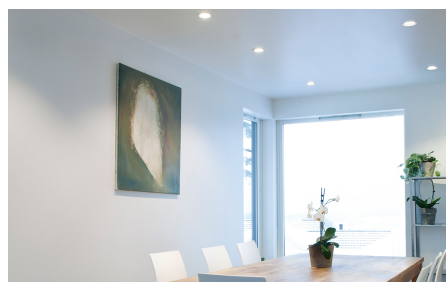

Bardo IsoSafe Airtight

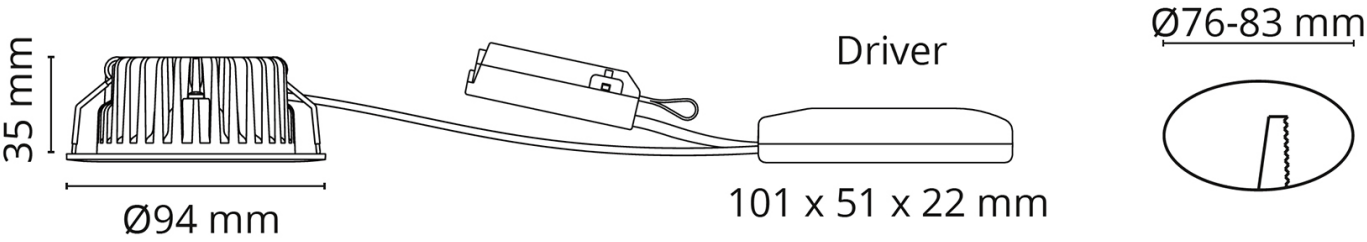

For line drawing dimensions please see each single article codes on next page

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 904407 Bardo Black 500lm 3000K Ra>95 Trailing edge 8W LED 63 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Glass Clear	Class II IP20/IP65	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904405 Bardo White 540lm 3000K Ra>95 Trailing edge 8W LED 68 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Glass Clear	Class II IP20/IP65	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904408 Bardo Black 530lm 4000K Ra>95 Trailing edge 8W LED 66 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Glass Clear	Class II IP20/IP65	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
 904406 Bardo White 570lm 4000K Ra>95 Trailing edge 8W LED 71 lm/W SDCM:2 L90/B10>100,000 Beam: 42°, Direct, Glass Clear	Class II IP20/IP65	Trailing edge	Recessed, Indoor / Outdoor Screwless terminal block	Ø94 x H37
Accessories				
 78740 Gelbox-I Black Connector				L135 x W48 x H30
 78741 Gelbox-Y Black Connector				L148 x W86 x H30
 820090 Emergencybox Adapter kit for downlight				L250 x W13 x H13
 8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours				L270 x W75 x H35