

Rax Soft 150 TW




Rax Soft TW is a high-performance downlight for lighting in public buildings, offices, corridors etc with an excellent light control by a combination of optimized lens and reflector optics. Available with satin matt reflector for high efficiency. Rax Soft TW is installed easily with springs that fit ceiling panels with a thickness of 1–50 mm. Tunable White 2700-6500K LED Dim or DALI Type 8.

Rax Soft 150 TW




Product- and environment images

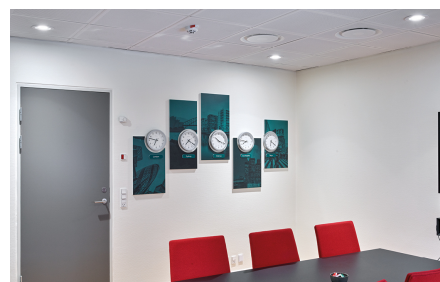


Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 212575 Rax Soft 150 Satin 2700-6500K Ra>80 TW DALI Type 8 28W LED 93 lm/W SDCM:3 L90/B10>100,000 Beam: 68°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	TW DALI Type 8	Recessed, Indoor 5 pol Linect / screwless terminal block	Ø166 x H83
 212574 Rax Soft 150 Satin TW LEDDim 2700-6500K Ra>80 TW LEDDim 28W LED 93 lm/W SDCM:3 L90/B10>100,000 Beam: 68°, Direct, Satin Matt Reflector	Class II SELV IP54/IP20 IK08	TW LEDDim	Recessed, Indoor 3 pol Linect / screwless terminal block	Ø166 x H83
Accessories				
 212617 Rax 150 Black Rehabring Ø155-200mm				Ø220 x H16
 212621 Rax 150 Black Glass clear IP44				Ø168 x H12
 212623 Rax 150 Black Glass frosted IP44				Ø168 x H12
 212620 Rax 150 White Glass clear IP44				Ø168 x H12
 212622 Rax 150 White Glass frosted IP44				Ø168 x H12
 8249044683 Rax 150 White Rehabring Ø155-200mm				Ø220 x H16
 900109 Reliefplate Weight distribution panel				L400 x W400 x H1

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 8249042216 Rax 150 Mounting plate				L585 x W260 x H15