




Fenes is an LED luminaire for mounting on pole or arm, suitable for sports tracks, residential areas, parking lots and similar. Features a multi-adapter which fits both poles Ø60 and arms Ø42/48 and is adjustable in steps of 5°. Fenes is ideal for replacing old 125W HQL and 70W NAV luminaires with energy saving LED technology. It is a compact and tough luminaire in die-cast aluminium and tempered glass front. It is delivered complete with 8 m cable.

Product- and environment images



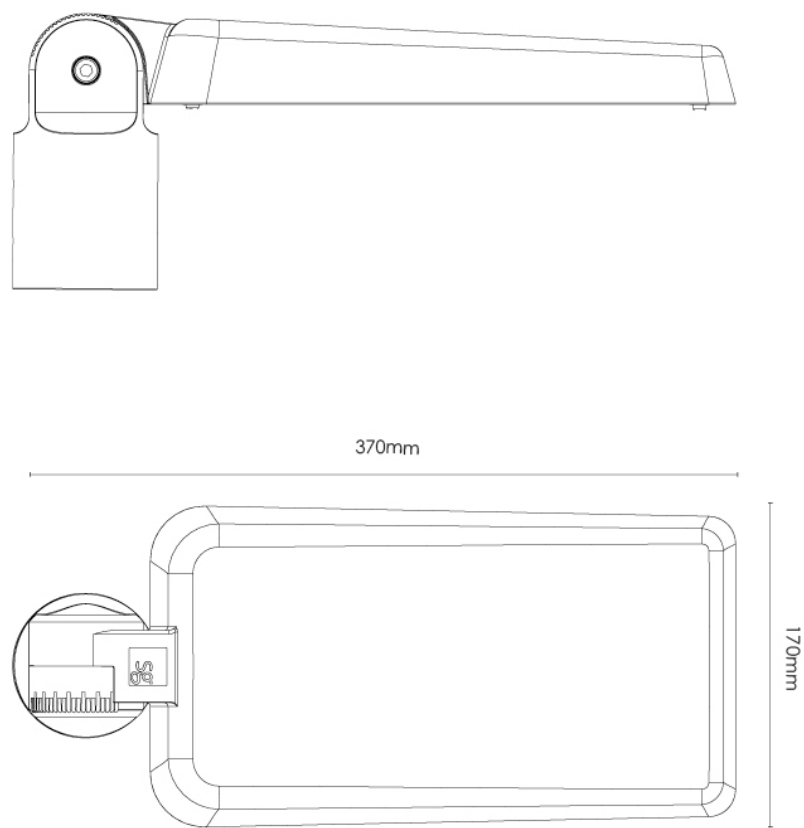

For line drawing dimensions please see each single article codes on next page

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	212644 Fenes Lens 1 Grey 3790lm 3000K Ra>70 DALI-2 35W LED 108 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	Class II IP66 IK08	DALI-2	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L379 x W168 x H145
	212631 Fenes Lens 1 Grey 2250lm 3000K Ra>70 On/Off 20W LED 113 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	Class II IP66 IK08	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145
	212632 Fenes Lens 1 Grey 3790lm 3000K Ra>70 On/Off 35W LED 108 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	Class II IP66 IK08	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145
	212638 Fenes Lens 2 Grey 4380lm 3000K Ra>70 On/Off 35W LED 125 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	Class II IP66 IK08	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145
	212647 Fenes Lens 1 Grey 4080lm 4000K Ra>70 DALI-2 35W LED 117 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	Class II IP66 IK08	DALI-2	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L379 x W168 x H145
	212634 Fenes Lens 1 Grey 2420lm 4000K Ra>70 On/Off 20W LED 121 lm/W SDCM:3	Class II IP66 IK08	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat 212659	Class II	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145
	Fenes Lens 1 Grey 4080lm 4000K Ra>70 On/Off 35W LED 117 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	IP66 IK08			
	212641	Class II	On/Off	Pole - Side Top (Ø42-48/Ø60), Outdoor Cable 2x1.0mm² 8m, H05RN-F	L370 x W170 x H145
	Fenes Lens 2 Grey 4710lm 4000K Ra>70 On/Off 35W LED 135 lm/W SDCM:3 L95/B50>100,000, L98>50,000 Direct, PMMA, Polymethylmethacrylat	IP66 IK08			
Accessories					
	8249043943 • Galvanized Reducer part from Ø76 to Ø60				L230 x W98 x H230
	623268 Fenes/Fenes Maxi Grey Corner bracket				Ø60 x L130 x W127 x H154
	623269 Fenes/Fenes Maxi Grey Wall bracket				Ø60 x L130 x W110 x H92

• = This article is produced by order, with an expected delivery time of 3-4 weeks.