





Inspire S is a rectangular surface mounted downlight for indoor use. With cubist black reflectors it has very low glare and harmonious non-flickering light with a well-defined light pattern. Inspire S is suitable for use in high-end residential and commercial environments. Easy installation with ceiling bracket, quick connector and snap attachment. Suitable for open or hidden cabling.

Inspire S

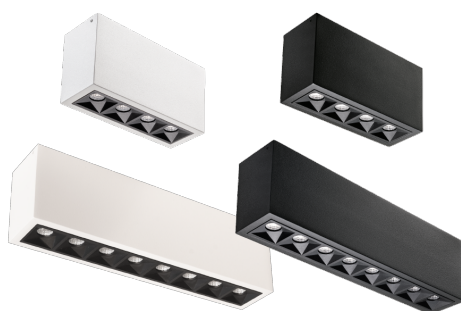

Product- and environment images



Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 320835 Inspire S 300 Black 900lm 2700K Ra 98 DALI-2 / Push Dim 15W LED 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	DALI-2 / Push Dim	Indoor Screwless terminal block	L300 x W59 x H85
 320823 Inspire S 150 Black 450lm 2700K Ra 98 Trailing edge 8W LED 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L160 x W59 x H85
 320829 Inspire S 300 Black 900lm 2700K Ra 98 Trailing edge 15W LED 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L300 x W59 x H85
 320832 Inspire S 300 White 900lm 2700K Ra 98 DALI-2 / Push Dim 15W LED 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	DALI-2 / Push Dim	Indoor Screwless terminal block	L300 x W59 x H85
 320820 Inspire S 150 White 450lm 2700K Ra 98 Trailing edge 8W LED 56 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L160 x W59 x H85
 320826 Inspire S 300 White 900lm 2700K Ra 98 Trailing edge 15W LED 60 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L300 x W59 x H85

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 320836 Inspire S 300 Black 950lm 3000K Ra 98 DALI-2 / Push Dim 15W LED 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	DALI-2 / Push Dim	Indoor Screwless terminal block	L300 x W59 x H85
 320824 Inspire S 150 Black 470lm 3000K Ra 98 Trailing edge 8W LED 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L160 x W59 x H85
 320830 Inspire S 300 Black 950lm 3000K Ra 98 Trailing edge 15W LED 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L300 x W59 x H85
 320821 Inspire S 150 White 470lm 3000K Ra 98 Trailing edge 8W LED 59 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L160 x W59 x H85
 320827 Inspire S 300 White 950lm 3000K Ra 98 Trailing edge 15W LED 63 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor Screwless terminal block	L300 x W59 x H85
 320837 Inspire S 300 Black 980lm 4000K Ra 98 DALI-2 / Push Dim 15W LED 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	DALI-2 / Push Dim	Indoor Screwless terminal block	L300 x W59 x H85

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 320825 Inspire S 150 Black 490lm 4000K Ra 98 Trailing edge 8W LED 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor	L160 x W59 x H85
 320831 Inspire S 300 Black 980lm 4000K Ra 98 Trailing edge 15W LED 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor	L300 x W59 x H85
 320834 Inspire S 300 White 980lm 4000K Ra 98 DALI-2 / Push Dim 15W LED 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	DALI-2 / Push Dim	Indoor	L300 x W59 x H85
 320822 Inspire S 150 White 490lm 4000K Ra 98 Trailing edge 8W LED 61 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor	L160 x W59 x H85
 320828 Inspire S 300 White 980lm 4000K Ra 98 Trailing edge 15W LED 65 lm/W SDCM:2 L90/B10>100,000 Beam: 55°, Direct,	Class I IP20	Trailing edge	Indoor	L300 x W59 x H85
Accessories				
 212482 Inspire Gold 150 Reflector				L140 x W38 x H16
 212483 Inspire Gold 300 Reflector				L280 x W38 x H16

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 212480 Inspire White 150 Reflector				L140 x W38 x H16
 212481 Inspire White 300 Reflector				L280 x W38 x H16