






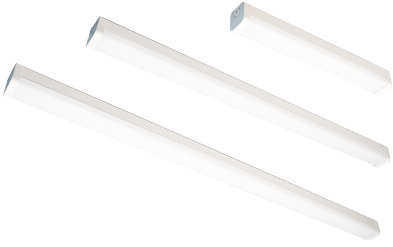

Hurdal is a highly efficient surface mounted luminaire for a wide variety of applications. It is easily installed directly in the ceiling or on the wall and has cable entrance in both ends in addition to two in the center. The luminaire is IP44 with steel base and aluminium end caps. Hurdal is available in three lengths. Dip switches makes it possible to adjust the light level.

Product- and environment images









Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>113112 Hurdal 600 White 1590lm 3000K Ra>80 DALI-2 12W LED 133 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L600 x W72 x H76
 <p>113113 Hurdal 1200 White 3460lm 3000K Ra>80 DALI-2 24W LED 144 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113114 Hurdal 1500 White 4640lm 3000K Ra>80 DALI-2 31W LED 150 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1500 x W72 x H76
 <p>113100 Hurdal 600 White 1590lm 3000K Ra>80 On/Off 12W LED 133 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L600 x W72 x H76
 <p>113101 Hurdal 1200 White 3460lm 3000K Ra>80 On/Off 24W LED 144 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113102 Hurdal 1500 White 4640lm 3000K Ra>80 On/Off 31W LED 150 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L1500 x W72 x H76







Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>113118 Hurdal 600 White 1590lm 3000K Ra>80 PIR Sensor 12W LED 133 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	PIR Sensor	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L600 x W72 x H76
 <p>113119 Hurdal 1200 White 3460lm 3000K Ra>80 PIR Sensor 24W LED 144 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	PIR Sensor	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113120 Hurdal 1500 White 4640lm 3000K Ra>80 PIR Sensor 31W LED 150 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	PIR Sensor	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L1500 x W72 x H76
 <p>113106 Hurdal 600 White 1590lm 3000K Ra>80 Sensor Dim 12W LED 133 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L600 x W72 x H76
 <p>113107 Hurdal 1200 White 3460lm 3000K Ra>80 Sensor Dim 24W LED 144 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L1200 x W72 x H76
 <p>113108 Hurdal 1500 White 4640lm 3000K Ra>80 Sensor Dim 31W LED 150 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L1500 x W72 x H76






Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>113115 Hurdal 600 White 1710lm 4000K Ra>80 DALI-2 12W LED 143 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L600 x W72 x H76
 <p>113116 Hurdal 1200 White 3660lm 4000K Ra>80 DALI-2 24W LED 153 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113117 Hurdal 1500 White 4820lm 4000K Ra>80 DALI-2 31W LED 155 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	DALI-2	Surface, Indoor 5-pole screwless terminal block with 5x2,5mm ² through wiring	L1500 x W72 x H76
 <p>113103 Hurdal 600 White 1710lm 4000K Ra>80 On/Off 12W LED 143 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L600 x W72 x H76
 <p>113104 Hurdal 1200 White 3660lm 4000K Ra>80 On/Off 24W LED 153 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113105 Hurdal 1500 White 4820lm 4000K Ra>80 On/Off 31W LED 155 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	On/Off	Surface, Indoor 3-pole screwless terminal block with 3x2,5mm ² through wiring	L1500 x W72 x H76

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>113122 Hurdal 1200 White 3660lm 4000K Ra>80 PIR Sensor 24W LED 153 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	PIR Sensor	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L1200 x W72 x H76
 <p>113123 Hurdal 1500 White 4820lm 4000K Ra>80 PIR Sensor 31W LED 155 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	PIR Sensor	Surface, Indoor 4-pole screwless terminal block with 4x2,5mm ² through wiring	L1500 x W72 x H76
 <p>113109 Hurdal 600 White 1710lm 4000K Ra>80 Sensor Dim 12W LED 143 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L600 x W72 x H76
 <p>113110 Hurdal 1200 White 3660lm 4000K Ra>80 Sensor Dim 24W LED 153 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L1200 x W72 x H76
 <p>113111 Hurdal 1500 White 4820lm 4000K Ra>80 Sensor Dim 31W LED 155 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opal</p>	Class I IP44 IK07	Sensor Dim	Surface, Indoor 6-pole screwless terminal block with 4x2,5mm ² through wiring+2x1,5mm ² control	L1500 x W72 x H76