

# Sense Surface Connect



Sense Surface Connect is an elegant, slim, surface-mounted ceiling luminaire featuring an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Surface Connect is engineered for tool-free installation, with a quick connector between bracket and front held firmly in place by strong magnets. An innovative mechanism lets you choose a flush front for concealed cable routing or a slightly floating front for surface-mounted cabling.

# Sense Surface Connect




## Product- and environment images



# Sense Surface Connect

Sg

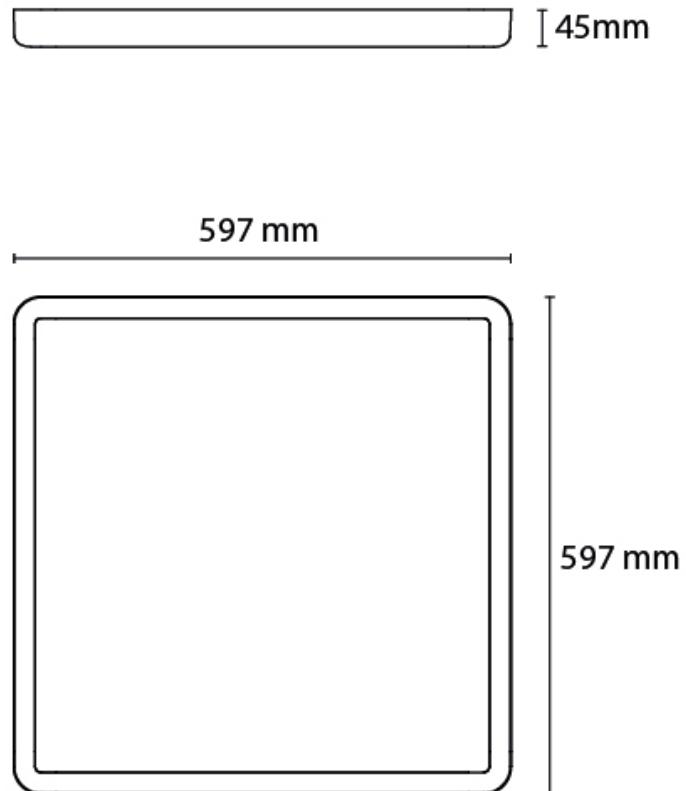

For line drawing dimensions please see each single article codes on next page

# Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	212353 <b>Sense Surface Connect 600x600</b> White 3640lm 3000K Ra>80 <b>Connect</b> <b>28W LED</b> 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism	<b>Class II</b> <b>IP20</b>	Connect	Surface, Indoor Screwless terminal block	L597 x W597 x H45
	212354 <b>Sense Surface Connect 300x1200</b> White 3790lm 3000K Ra>80 <b>Connect</b> <b>29W LED</b> 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism	<b>Class II</b> <b>IP20</b>	Connect	Surface, Indoor Screwless terminal block	L1202 x W302 x H45
	212355 <b>Sense Surface Connect 600x600</b> White 3870lm 4000K Ra>80 <b>Connect</b> <b>28W LED</b> 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism	<b>Class II</b> <b>IP20</b>	Connect	Surface, Indoor Screwless terminal block	L597 x W597 x H45
	212356 <b>Sense Surface Connect 300x1200</b> White 3980lm 4000K Ra>80 <b>Connect</b> <b>29W LED</b> 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism	<b>Class II</b> <b>IP20</b>	Connect	Surface, Indoor Screwless terminal block	L1202 x W302 x H45
<b>Accessories</b>					
	212255 <b>T-profil White Suspension Rail 600mm</b>				L596 x W35 x H17
	212234 <b>Sense Surface/Disc 760 2m Wire kit</b>				L2000