


# Inspire Connect



Inspire Connect is a slim and minimalist luminaire featuring an integrated SG Connect sensor for smart and energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Inspire Connect combines direct, glare-free light using PMMA optics with indirect wide-beam illumination for effective task lighting over desks and in office environments. It is supplied with a 2.5-meter cable and adjustable wire suspension with fittings for ceiling and T-profile, and comes in powder-coated aluminum in matte black or white.

## Product- and environment images



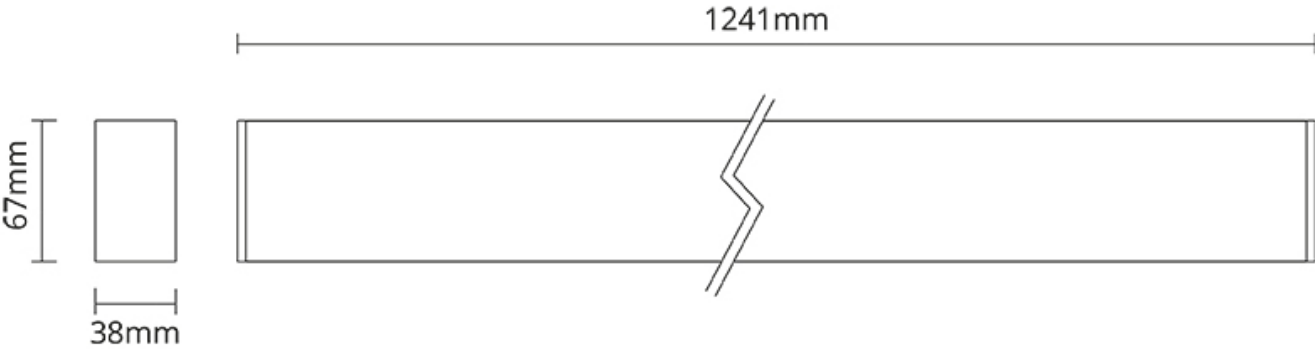

For line drawing dimensions please see each single article codes on next page

# Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>212477  <b>Inspire Connect 1200 Black prism</b>  <b>3510lm 3000K Ra&gt;80 Connect</b>  <b>29W LED</b>                      121 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70
 <p>212476  <b>Inspire Connect 1200 White prism</b>  <b>4000lm 3000K Ra&gt;80 Connect</b>  <b>29W LED</b>                      138 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70
 <p>212931  <b>Inspire Connect 1200 White prism</b>  <b>3580lm 3000K Ra&gt;90 Connect</b>  <b>29W LED</b>                      123 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70
 <p>212479  <b>Inspire Connect 1200 Black prism</b>  <b>3620lm 4000K Ra&gt;80 Connect</b>  <b>29W LED</b>                      125 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70
 <p>212478  <b>Inspire Connect 1200 White prism</b>  <b>4130lm 4000K Ra&gt;80 Connect</b>  <b>29W LED</b>                      142 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70
 <p>212932  <b>Inspire Connect 1200 White prism</b>  <b>3860lm 4000K Ra&gt;90 Connect</b>  <b>29W LED</b>                      133 lm/W SDCM:3                      L80/B20&gt;100,000, L90&gt;50,000                      Direct/Indirect 50/50%, Prism Optic</p>	<b>Class I</b> <b>IP20</b>	Connect	Suspended, Indoor 2x2m wire kit Cable 3x0,75mm <sup>2</sup> 2,5m	L1241 x W38 x H70