

Disc Connect




Disc Connect is an energy-efficient, surface-mounted LED luminaire with a slim profile for a clean, modern look. It comes with an integrated SG Connect sensor for smart and energy-saving lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. An opal prismatic diffuser ensures glare-free light, and the fixture is crafted from powder-coated aluminum in matte black or white. Installation is quick with a snap-on connection between luminaire and backplate, and the design is adapted for both concealed and exposed cable routing.

Disc Connect



Product- and environment images



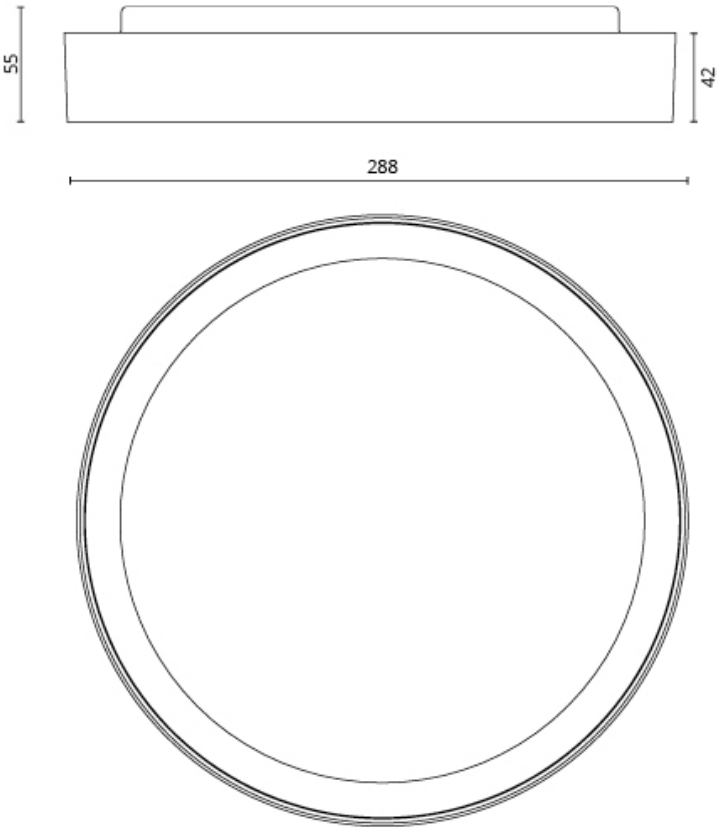

For line drawing dimensions please see each single article codes on next page

Article codes



Article		Protection	Control gear	Mounting/Connection	Dimensions
	606235 Disc 760 Black 5690/6030lm 3000/4000K Ra>80 Connect 48W LED 119/126lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface Screwless terminal block	Ø760 x H55
	606234 Disc 760 White 5990/6340lm 3000/4000K Ra>80 Connect 48W LED 125/132lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface Screwless terminal block	Ø760 x H55
	606241 Disc 760 White 5092/5389lm 3000/4000K Ra>90 Connect 48W LED 106/112lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface Screwless terminal block	Ø760 x H55
	606232 Disc 480 Black 3390lm 3000K Ra>80 Connect 31W LED 109 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø470 x H55
	606236 Disc 290 Black 1900lm 3000K Ra>80 Connect 17W LED 112 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø288 x H55
	606170 Disc 480 White 3560lm 3000K Ra>80 Connect 36W LED 99 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø470 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606172 Disc 290 White 1990lm 3000K Ra>80 Connect 17W LED 117 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø288 x H55
 606237 Disc 290 White 1692lm 3000K Ra>90 Connect 17W LED 100 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor 3 pole Screwless terminal block	Ø288 x H55
 606239 Disc 480 White 3026lm 3000K Ra>90 Connect 36W LED 84 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor 3 pole Screwless terminal block	Ø470 x H55
 606171 Disc 480 White 3780lm 4000K Ra>80 Connect 36W LED 105 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø470 x H55
 606173 Disc 290 White 2110lm 4000K Ra>80 Connect 17W LED 124 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor Screwless terminal block	Ø288 x H55
 606238 Disc 290 White 1794lm 4000K Ra>90 Connect 17W LED 106 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor 3 pole Screwless terminal block	Ø288 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 606240 Disc 480 White 3213lm 4000K Ra>90 Connect 36W LED 89 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Beam: 85°, Direct, Opalprism	Class II IP20 IK10	Connect	Surface, Indoor 3 pole Screwless terminal block	Ø470 x H55
Accessories				
 606095 Disc/Frosta Black Pendant Adapter				L5000 x W102 x H22
 606094 Disc/Frosta White Pendant Adapter				L5000 x W102 x H22