




Ecoline Connect is a slim and elegant ceiling luminaire for offices, schools, and public buildings, featuring an integrated SG Connect sensor for smart and energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Ecoline Connect features a 3-layer optical system with low glare ($UGR < 19$) and a robust housing in powder-coated steel. It can be mounted directly on the ceiling or suspended using the adjustable wire kit (sold separately).

Product- and environment images



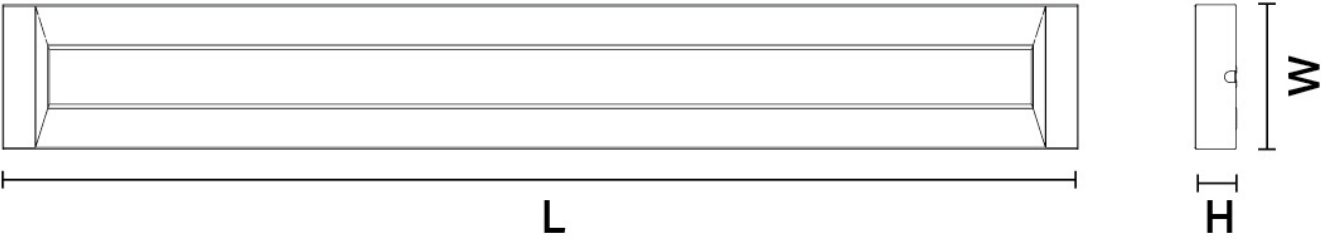

For line drawing dimensions please see each single article codes on next page





Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>212096 Ecoline Connect 1200 White 3910lm 3000K Ra>80 Connect 30W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1235 x W166 x H55
 <p>212098 Ecoline Connect 1600 White 4880lm 3000K Ra>80 Connect 36W LED 136 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1600 x W166 x H55
 <p>212816 Ecoline Connect 1200 White 3324lm 3000K Ra>90 Connect 30W LED 111 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1235 x W166 x H55
 <p>212818 Ecoline Connect 1600 White 4148lm 3000K Ra>90 Connect 36W LED 115 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1600 x W166 x H55
 <p>212097 Ecoline Connect 1200 White 4150lm 4000K Ra>80 Connect 30W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1235 x W166 x H55
 <p>212099 Ecoline Connect 1600 White 5180lm 4000K Ra>80 Connect 36W LED 144 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1600 x W166 x H55

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>212817 Ecoline Connect 1200 White 3528lm 4000K Ra>90 Connect 30W LED 118 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1235 x W166 x H55
 <p>212819 Ecoline Connect 1600 White 4403lm 4000K Ra>90 Connect 36W LED 122 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprism</p>	Class I IP20	Connect	Suspended or surface, Indoor 3 pole Screwless terminal block	L1600 x W166 x H55
Accessories				
 <p>212255 T-profil White Suspension Rail 600mm</p>				L596 x W35 x H17
 <p>212095 EcoLine Wire kit</p>				L2000