

# Rax Soft 150 IP65




Rax Soft 150 IP65 is a high-performance downlight for outdoor use or other areas requiring high IP-resistance. It has excellent light control by a combination of optimized lens and reflector optics. Rax Soft 150 is installed easily with springs that fit ceiling panels with a thickness of 1–50 mm.

# Rax Soft 150 IP65



## Product- and environment images

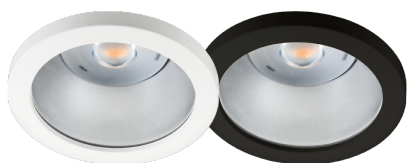

# Article codes



| Article                                                                             |                                                                                                                                                                                            | Protection                                                 | Control gear | Mounting/Connection                                          | Dimensions |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|--------------|--------------------------------------------------------------|------------|
|    | 212752<br><b>Rax Soft IP65 150 Black 4000</b><br><b>3550lm 3000K Ra&gt;80 On/Off</b><br><b>34W LED</b><br>104 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 68°, Direct, Satin Matt<br>Reflector | <b>Class II SELV</b><br><br><b>IP65</b><br><br><b>IK06</b> | On/Off       | Recessed, Indoor / Outdoor<br>5 pol Screwless terminal block | Ø175 x H94 |
|    | 212750<br><b>Rax Soft IP65 150 White 4000</b><br><b>3560lm 3000K Ra&gt;80 On/Off</b><br><b>34W LED</b><br>105 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 68°, Direct, Satin Matt<br>Reflector | <b>Class II SELV</b><br><br><b>IP65</b><br><br><b>IK06</b> | On/Off       | Recessed, Indoor / Outdoor<br>5 pol Screwless terminal block | Ø175 x H94 |
|   | 212753<br><b>Rax Soft IP65 150 Black 4000</b><br><b>3680lm 4000K Ra&gt;80 On/Off</b><br><b>34W LED</b><br>108 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 68°, Direct, Satin Matt<br>Reflector | <b>Class II SELV</b><br><br><b>IP65</b><br><br><b>IK06</b> | On/Off       | Recessed, Indoor / Outdoor<br>5 pol Screwless terminal block | Ø175 x H94 |
|  | 212751<br><b>Rax Soft IP65 150 White 4000</b><br><b>3690lm 4000K Ra&gt;80 On/Off</b><br><b>34W LED</b><br>109 lm/W SDCM:2<br>L90/B10>100,000<br>Beam: 68°, Direct, Satin Matt<br>Reflector | <b>Class II SELV</b><br><br><b>IP65</b><br><br><b>IK06</b> | On/Off       | Recessed, Indoor / Outdoor<br>5 pol Screwless terminal block | Ø175 x H94 |
| <b>Accessories</b>                                                                  |                                                                                                                                                                                            |                                                            |              |                                                              |            |
|  | 212767<br><b>Rax Soft 150 Black Rehabring Ø155-200mm (In/Outdoor)</b>                                                                                                                      |                                                            |              |                                                              | Ø220 x H16 |
|  | 212766<br><b>Rax Soft 150 White Rehabring Ø155-200mm (In/Outdoor)</b>                                                                                                                      |                                                            |              |                                                              | Ø220 x H16 |