

Sense Basic Connect




Sense Basic Connect is a cost-effective LED panel that's ideal for both new installations and refurbishment projects. It features an integrated SG Connect sensor for smart, energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the panel can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Sense Basic Connect comes in a lightweight steel housing with a slim 36 mm profile and a back-lit design for even, comfortable illumination. Supplied in single packs for easy handling.

Sense Basic Connect





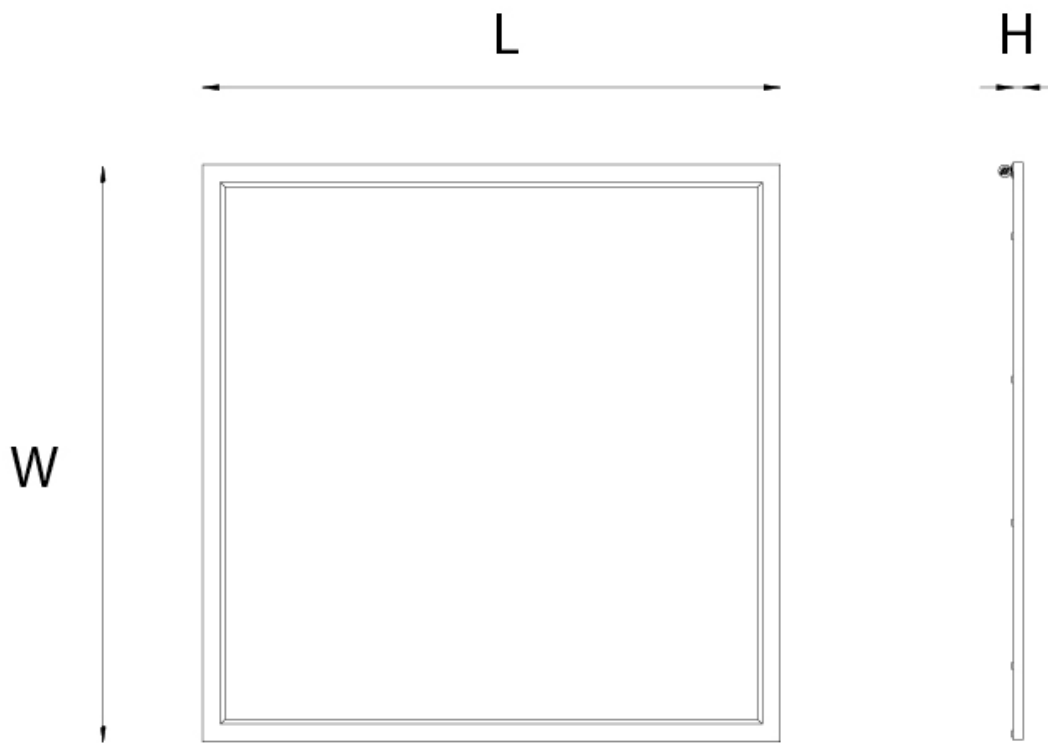


Product- and environment images





For line drawing dimensions please see each single article codes on next page

Article	Protection	Control gear	Mounting/Connection	Dimensions
 <p>212706 Sense Basic 600x600 White Incl driver 4320lm 3000K Ra>80 Connect 33W LED 131 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprism</p>	Class II SELV IP20	Connect	Recessed, Indoor 3 pol Linect / screwless terminal block	L595 x W595 x H36
 <p>212707 Sense Basic 600x600 White Incl driver 4390lm 4000K Ra>80 Connect 33W LED 133 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprism</p>	Class II SELV IP20	Connect	Recessed, Indoor 3 pol Linect / screwless terminal block	L595 x W595 x H36
Accessories				
 <p>212688 Sense Decor Sky White 600x600 Frame</p>				L597 x W597 x H79
 <p>8246094429 Emergencybox Driver DALI / EM Self test, DALI Emergency 3 hours</p>				L270 x W75 x H35
 <p>8246094364 Emergencybox On-Off/Trailing edge / EM Self test, Emergency 3 hours</p>				L270 x W75 x H35