

Hurdal Maxi Connect



Hurdal Maxi Connect is a versatile ceiling and wall luminaire with a sleek design, equipped with an integrated SG Connect sensor for smart and energy-efficient lighting control. The sensor switches the light on when motion is detected and off after a defined time period, delivering significant energy savings. A built-in daylight sensor can be activated to maintain the desired light level at all times. Configuration is simple via the SG Connect Commissioning App, and the luminaire can be used as a standalone unit or as part of a larger system that can easily be expanded or reconfigured as needed. Hurdal Maxi Connect combines high performance with easy installation. It mounts directly on ceilings or walls, with cable entry at both ends and in the middle, and through-wiring ensures quick and efficient connection. The luminaire is IP44-rated and features a robust steel housing with aluminum end caps for long-lasting and reliable operation.


Hurdal Maxi Connect



Product- and environment images



Hurdal Maxi Connect

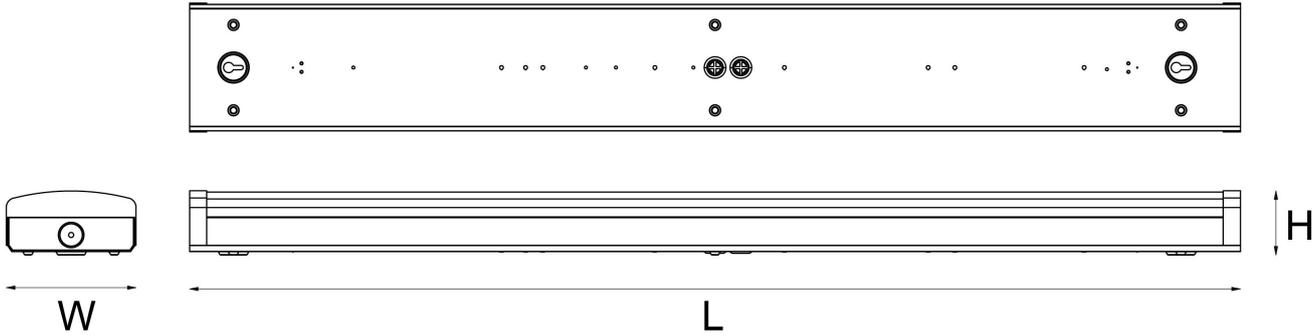

For line drawing dimensions please see each single article codes on next page

Article codes



Article	Protection	Control gear	Mounting/Connection	Dimensions
<p><i>Not released yet</i></p> <p>113143</p> <p>Hurdal Maxi 1200 White 5610lm</p> <p>3000K Ra>80 Connect</p> <p>37W LED</p> <p>152 lm/W SDCM:3</p> <p>L80/B20>100,000, L90>50,000</p> <p>Direct, Opal</p>	<p>Class I</p> <p>IP44</p>	Connect	<p>Indoor</p> <p>3-pole screwless terminal block with 3x2,5mm² through wiring</p>	L1220 x W151 x H75
<p><i>Not released yet</i></p> <p>113144</p> <p>Hurdal Maxi 1500 White 6980lm</p> <p>3000K Ra>80 Connect</p> <p>46W LED</p> <p>152 lm/W SDCM:3</p> <p>L80/B20>100,000, L90>50,000</p> <p>Direct, Opal</p>	<p>Class I</p> <p>IP44</p>	Connect	<p>Indoor</p> <p>3-pole screwless terminal block with 3x2,5mm² through wiring</p>	L1500 x W151 x H75
<p><i>Not released yet</i></p> <p>113145</p> <p>Hurdal Maxi 1200 White 5870lm</p> <p>4000K Ra>80 Connect</p> <p>37W LED</p> <p>159 lm/W SDCM:3</p> <p>L80/B20>100,000, L90>50,000</p> <p>Direct, Opal</p>	<p>Class I</p> <p>IP44</p>	Connect	<p>Indoor</p> <p>3-pole screwless terminal block with 3x2,5mm² through wiring</p>	L1220 x W151 x H75
<p><i>Not released yet</i></p> <p>113146</p> <p>Hurdal Maxi 1500 White 7330lm</p> <p>4000K Ra>80 Connect</p> <p>46W LED</p> <p>159 lm/W SDCM:3</p> <p>L80/B20>100,000, L90>50,000</p> <p>Direct, Opal</p>	<p>Class I</p> <p>IP44</p>	Connect	<p>Indoor</p> <p>3-pole screwless terminal block with 3x2,5mm² through wiring</p>	L1500 x W151 x H75