

Lineal Recessed



Lineal Recessed is a modular system solution for recessed mounting, with a perfect, well thought-out design for continuous light in illuminated lines. Lineal Recessed appears elegant in both ceilings and walls. It is easy to install in different ceiling plate thicknesses with a 90 degree turn bracket. The efficient lighting solution optimises visual comfort and light quality, and makes Lineal Trim ideal for many applications such as offices, corridors and foyers or as decorative lighting. For each continuous line, you need one or more straight lines and/or corners, a start kit and a front cover. Lineal Recessed can be combined with Lineal Cubic Recessed, enabling creative lighting designs.


Lineal Recessed




Product- en omgevingsbeelden



Lineal Recessed

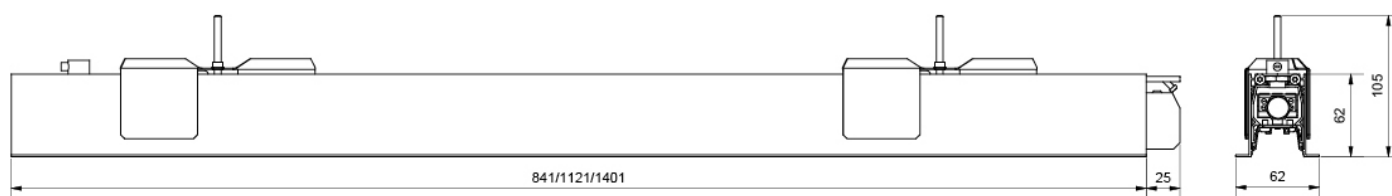

De afmetingen van de lijntekening vindt u bij de afzonderlijke artikelcodes op de volgende pagina

Artikel		Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	8246095648	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L841 x W62 x H62
	Lineal recessed 840 Wit 1380lm	IP20			
	3000K Ra>80 DALI-2 / Push Dim	IK08			
	13W LED				
	106 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					
	8246095664	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L1121 x W62 x H62
	Lineal recessed 1120 Wit 1870lm	IP20			
	3000K Ra>80 DALI-2 / Push Dim	IK08			
	17W LED				
	110 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					
	8246095677	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L1401 x W62 x H62
	Lineal recessed 1400 Wit 2320lm	IP20			
	3000K Ra>80 DALI-2 / Push Dim	IK08			
	21W LED				
	110 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					
	8246095703	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L627 x W581 x H70
	Lineal recessed Corner Wit 1870lm	IP20			
	3000K Ra>80 DALI-2 / Push Dim	IK08			
	17W LED				
	110 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					
	8246095059	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L1121 x W62 x H62
	Lineal recessed 1120 Wit 1970lm	IP20			
	4000K Ra>80 DALI-2 / Push Dim	IK08			
	17W LED				
	116 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					
	8246095651	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor 5 pol Winsta mini og 5x1,5 doorvoerbedrading	L841 x W62 x H62
	Lineal recessed 840 Wit 1450lm	IP20			
	4000K Ra>80 DALI-2 / Push Dim	IK08			
	13W LED				
	112 lm/W SDCM:3				
	L80/B10>100,000, L93/>50,000				
Direct,					

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	8246095680	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor
	Lineal recessed 1400 Wit 2440lm 4000K Ra>80 DALI-2 / Push Dim 21W LED 116 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Direct,	IP20 IK08	5 pol Winsta mini og 5x1,5 doorvoerbedrading	L1401 x W62 x H62
	8246095716	Klasse I	DALI-2 / Push Dim	Inbouw, Indoor
	Lineal recessed Corner Wit 1970lm 4000K Ra>80 DALI-2 / Push Dim 17W LED 116 lm/W SDCM:3 L80/B10>100,000, L93/>50,000 Direct,	IP20 IK08	5 pol Winsta mini og 5x1,5 doorvoerbedrading	L627 x W581 x H70
Accessoires				
	8249045080			L2240 x W38 x H4
	Lineal 2240 Zwart Blind profile Frontpaneel			
	8246095693			L285 x W240 x H36
	Lineal recessed Start kit Wit DALI-2 / Push Dim			
	8246096207			L1121 x W62 x H62
	Lineal recessed 1120 Wit Blind profile DALI-2 / Push Dim			
	8249045077			L2240 x W38 x H4
	Lineal 2240 Wit Blind profile Frontpaneel			
	8249044968			L2800 x W38 x H4
	Lineal 2800 Frontpaneel			
	8249044971			L5600 x W38 x H4
	Lineal 5600 Frontpaneel			
	8249044984			L8400 x W38 x H4
	Lineal 8400 Frontpaneel			