



Sense Surface

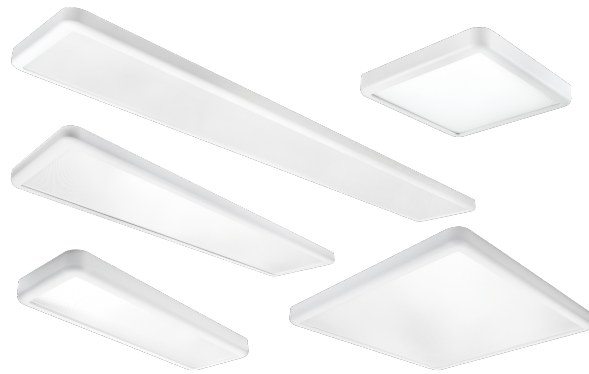

Sense Surface is an elegant, thin surface mounted luminaire, illuminated by a side light LED solution. Easy tool-free installation, with quick connector between bracket and the front is held by strong magnets with restraining strap. An innovative mechanism lets you choose whether the front should be totally flush with the ceiling for hidden cabling or floating slightly below for surface cabling.

Product- en omgevingsbeelden

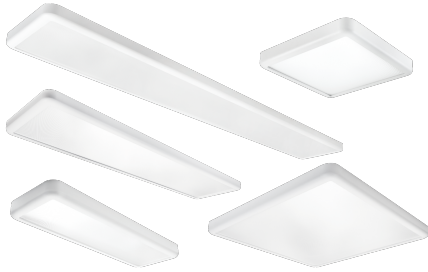

Artikel		Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212348	Klasse II	PIR Sensor	Opbouw, Indoor	L642 x W202 x H45
	Sense Surface 640x200 Wit 1830lm	IP20		Schroefloos klemmenblok	
	2700K Ra>80 PIR Sensor	IK10			
	18W LED				
	102 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma				
	212374	Klasse II	Fase afsnijding	Opbouw, Indoor	L642 x W202 x H45
	Sense Surface 640x200 Wit 1830lm	IP20		Schroefloos klemmenblok	
	2700K Ra>80 Fase afsnijding	IK10			
	18W LED				
	102 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma				
	212350	Klasse II	Fase afsnijding	Opbouw, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Zwart	IP20		Schroefloos klemmenblok	
	3770lm 3000K Ra>80 Fase afsnijding	IK10			
	30W LED				
	126 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma				
	212351	Klasse II	Fase afsnijding	Opbouw, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Zwart	IP20		Schroefloos klemmenblok	
	3690lm 3000K Ra>80 Fase afsnijding	IK10			
	30W LED				
	123 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma				
	212331	Klasse II	DALI-2 / Push Dim	Opbouw, Indoor	L597 x W597 x H45
	Sense Surface 600x600 Wit 3640lm	IP20		Schroefloos klemmenblok	
	3000K Ra>80 DALI-2 / Push Dim	IK10			
	28W LED				
	130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma				
	212361	Klasse II	DALI-2 / Push Dim	Opbouw, Indoor	L1202 x W302 x H45
	Sense Surface 300x1200 Wit	IP20		Schroefloos klemmenblok	
	3790lm 3000K Ra>80 DALI-2 / Push	IK10			
	Dim				
	29W LED				
	131 lm/W SDCM:3 L80/B20>100,000, L90>50,000				

Artikel	Direct, Opalprisma	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
	212344 Sense Surface 600x600 Wit 3640lm 3000K Ra>80 PIR Sensor 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212346 Sense Surface 300x1200 Wit 3790lm 3000K Ra>80 PIR Sensor 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212349 Sense Surface 640x200 Wit 1910lm 3000K Ra>80 PIR Sensor 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
	212330 Sense Surface 600x600 Wit 3640lm 3000K Ra>80 Fase afsnijding 28W LED 130 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212360 Sense Surface 300x1200 Wit 3790lm 3000K Ra>80 Fase afsnijding 29W LED 131 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212375 Sense Surface 640x200 Wit 1910lm 3000K Ra>80 Fase afsnijding 18W LED 106 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45

Artikel	Bescherming	Regelapparaat	Montage/Aansluiting	Afmetingen
 212392 Sense Surface 300x1600 Wit 4910lm 3000K Ra>80 Fase afsnijding 38W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1582 x W302 x H45
 212394 Sense Surface 370x370 Wit 1980lm 3000K Ra>80 Fase afsnijding 17W LED 116 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L370 x W370 x H45
 212403 Sense Surface 600x600 Zwart 4010lm 4000K Ra>80 Fase afsnijding 30W LED 134 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
 212404 Sense Surface 300x1200 Zwart 4000K Ra>80 Fase afsnijding 30W LED 129 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
 212338 Sense Surface 600x600 Wit 4000K Ra>80 DALI-2 / Push Dim 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
 212368 Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 DALI-2 / Push Dim 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000	Klasse II IP20 IK10	DALI-2 / Push Dim	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45

Artikel	Direct, Opalprisma	Bescherming	Regelapparaatuu r	Montage/Aansluiting	Afmetingen
	212345 Sense Surface 600x600 Wit 4000K Ra>80 PIR Sensor 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212347 Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 PIR Sensor 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	PIR Sensor	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212326 Sense Surface 640x200 Wit 2030lm 4000K Ra>80 Fase afsnijding 18W LED 113 lm/W SDCM:3 L80/B20>100,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L642 x W202 x H45
	212337 Sense Surface 600x600 Wit 4000K Ra>80 Fase afsnijding 28W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L597 x W597 x H45
	212367 Sense Surface 300x1200 Wit 3980lm 4000K Ra>80 Fase afsnijding 29W LED 137 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1202 x W302 x H45
	212399 Sense Surface 300x1600 Wit 5240lm 4000K Ra>80 Fase afsnijding 38W LED 138 lm/W SDCM:3 L80/B20>100,000, L90>50,000 Direct, Opalprisma	Klasse II IP20 IK10	Fase afsnijding	Opbouw, Indoor Schroefloos klemmenblok	L1582 x W302 x H45

Accessoires

	212255 T-profil Wit Ophangrail 600mm	L596 x W35 x H17
--	--	------------------

	212234 Sense Surface/Disc 760 2m Pendelkit	L2000
---	--	-------

	820307 Noodverlichting batterij 3 Hours 3.0Ah - Model No: B093	L137 x W27 x H27
--	--	------------------