

Area 66 Pro



Area 66 Pro 1500 Grey 9300lm 4000K Ra>80 On/Off

Article code: 120007
EAN: 7021981200077



Electrical

System wattage: 65W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 20, B16: 32, C10: 32, C16: 51
Leakage current (mA): 0.25

Light technic

Type of light source: LED
Luminous flux: 9300lm
Efficacy: 143 lm/W
Colour temperature: 4000K
Colour rendering (Ra): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100.000 (<35°C)
Minimum ambient temperature: -40°C
Maximum ambient temperature: 45°C
Lifetime at max ambient temperature: L80/B50>50,000
Light distribution: Direct
Optic: Opal
UGR: UGR>28

Discontinued

Control/Dimming

Type: On/Off

Protection

Luminaire class: Class I
IK Class: IK08
IP Class: IP66
Fire protection class: 850°C - 30s

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Polycarbonat (PC)
Colour: Grey
Optics: Polycarbonat (PC)

Mounting/Connection



Mounting: Surface, Indoor
Module: 1500
Connection: 5-pole screwless terminal block with 5x2,5mm2 through wiring

Dimensions

Length (mm) L: 1460
Width (mm) W: 112
Height (mm) H: 67
Weight (kg) gross/net: 2.474 / 2.121

Packaging

Packing dimensions (mm): 1466 x 114 x 71

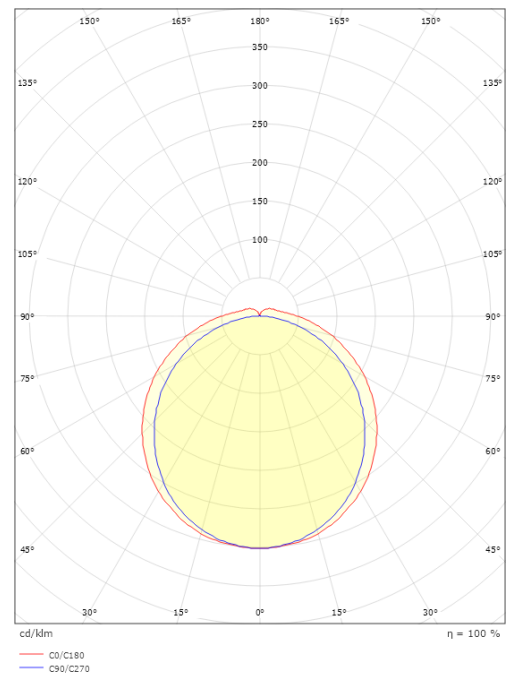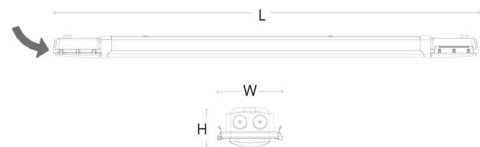

7 0 2 1 9 8 1 2 0 0 7 7