

## Area 66 Grey 5930lm 4000K Ra>80 DALI

Article code: 120004  
 EAN: 7021981200046



### Electrical

System wattage: 46W  
 Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 24, C16: 38  
 Leakage current (mA): 0.30

### Light technic

Type of light source: LED  
 Luminous flux: 5930lm  
 Efficacy: 129 lm/W  
 Colour temperature: 4000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B10>100,000  
 Lifetime: L90/B50>50,000  
 Minimum ambient temperature: -25°C  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 100°  
 UGR: UGR<28

### Control/Dimming

Type: DALI

### Protection

Luminaire class: Class I

### Energy and approvals

Contains light source of energy class: D  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: UV-stabilized polycarbonate  
 Colour: Grey  
 Optics: UV-stabilized polycarbonate

### Mounting/Connection



Mounting: Surface, Indoor  
 Connection: 7-pole screwless terminal block with 5x2,5mm2 (+DALI) through wiring

### Dimensions

Length (mm) L: 1460  
 Width (mm) W: 92  
 Height (mm) H: 70  
 Weight (kg) gross/net: 2.904 / 2.42

### Packaging

Packing dimensions (mm): 1515 x 110 x 80

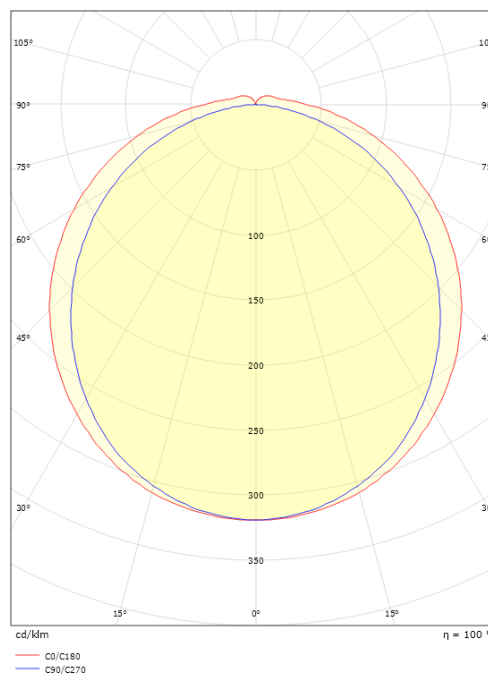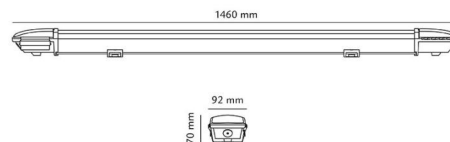

7 0 2 1 9 8 1 2 0 0 4 6