

Calando White 650lm 3000K Ra>80 Trailing edge dimming

Article code: 211514
 EAN: 7021982115141
 Replaces: 211512



Electrical

System wattage: 10W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

Light technic

Type of light source: LED
 Luminous flux: 650lm
 Efficacy: 65 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B50>50,000
 Light distribution: Direct
 Optic: Glass Opal
 Beam angle: 120°
 Photobiological safety: RG 0

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 IP Class: IP44

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: White (RAL 9003)
 Optics: Glass

Mounting/Connection



Mounting: Surface, Indoor
 Connection: Screwless terminal block

Dimensions

Length (mm) L: 280
 Width (mm) W: 280
 Height (mm) H: 100
 Weight (kg) gross/net: 2.652 / 2.21

Packaging

Packing dimensions (mm): 300 x 300 x 160

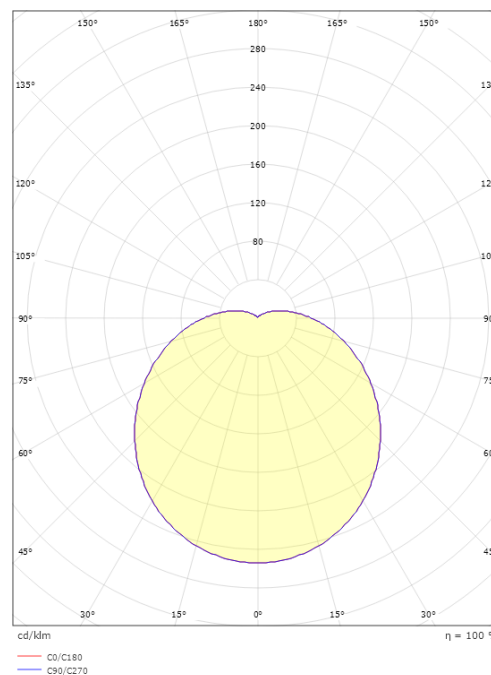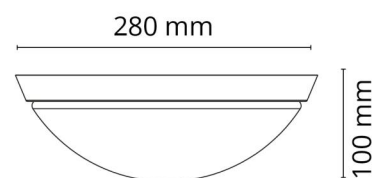

7 0 2 1 9 8 2 1 1 5 1 4 1