

Ceres White 1500/2500 3000/4000K Ra>80 Trailing edge dimming

Article code: 911126
 EAN: 7021989111269
 Replaces: 911121



Electrical

Wattage: 13W/24W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 40, B16: 60, C10: 40, C16: 60

Light technic

Type of light source: LED
 Luminous flux: 1390lm/1480lm/2240lm/2400lm
 Efficacy: 107/114/93/100lm/W
 Colour temperature: 3000/4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>50,000
 Light distribution: Direct
 Beam angle: 85°
 UGR: UGR<19/22
 Photobiological safety: RG 1

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II
 IK Class: IK08
 IP Class: IP20

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium base and PC front with aluminium reflector
 Colour: White (RAL 9003)

Mounting/Connection



Mounting: Surface, Indoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 108
 Diameter (mm) D: 290
 Weight (kg) gross/net: 2.28 / 1.91

Packaging

Packing dimensions (mm): 298 x 298 x 130

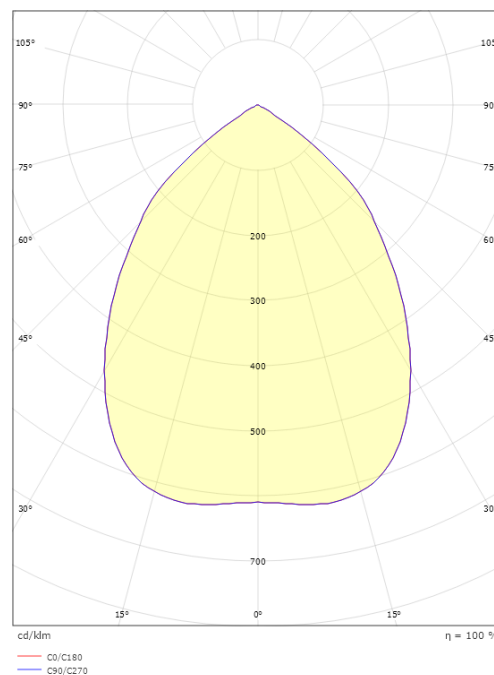

7 0 2 1 9 8 9 1 1 2 6 9