CircLED Single

CircLED Single Grey Top 2430lm 4000K Ra>80 On/Off

Article code: EAN:

8246084484 5703821165846

• = This article is produced by order, with an expected delivery time of 3-4 weeks.



Post - top (Ø60mm), Outdoor

Cable 2x1mm² 6m

460

390

185

0,0415m² - Max 6,2 kg

21W

220-240V Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

Light technic

Electrical System wattage:

Voltage:

Light technic	
Type of light source:	LED
Luminous flux:	2430lm
Efficacy:	116 lm/W
Colour temperature:	4000K
Colour rendering (CRI):	Ra>80
MacAdams factor:	SDCM: 2
Lifetime:	L90/B10>100,000
Light distribution:	Single Lens
Optic:	Lens
Control/Dimming	
Туре:	On/Off
Protection	
Luminaire class:	Class II
Energy and approvals	
Contains light source of operay class:	П

Contains light source of energy class: D Fulfils Hea 01 for flicker free lighting Breeam:

Materials and finish

1 0
Tempered glass
ey (structure 2150 sablé)
Die-cast aluminium

Mounting/Connection

Dimor	sions		
Wind p	projected area:		
Cable:			
Mount	ing:		


Dimensions		
Length (mm) L:		
Width (mm) W:		
Height (mm) H:		

Weight (kg) gross/net:	8.2 / 8
Packaging	
Packing dimensions (mm):	525 x 395 x 210







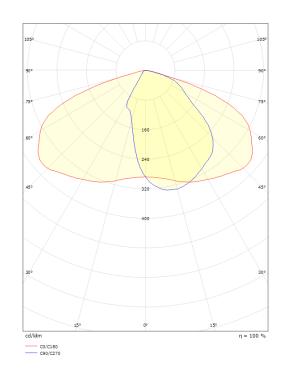

57038211658

