

Curve Direct



Curve Direct Black 550lm 3000K Ra>80 Trailing edge dimming

Article code: 611397
EAN: 7021986113976
Replaces: 614366




Electrical

System wattage: 7W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 15, B16: 25, C10: 31, C16: 50

Light technic

Type of light source: LED
Luminous flux: 550lm
Efficacy: 79 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Lifetime: L80/B10>100,000
Light distribution: Direct
Optic: Glass Frosted
Visible flicker (PstLM): 0.06
Stroboscopic flicker (SVM): 0.38
ULOR (): Yes



Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I
IK Class: IK06
IP Class: IP65

Energy and approvals

Contains light source of energy class: C
Breem: Fulfil Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: Black (RAL 9004)
Optics: Tempered glass

Mounting/Connection


Mounting: Surface, Indoor / Outdoor
Connection: Screwless terminal block

Dimensions

Width (mm) W: 320
Height (mm) H: 60
Depth (D): 103
Weight (kg) gross/net: 1.54 / 1.4

Packaging

Packing dimensions (mm): 330 x 120 x 70

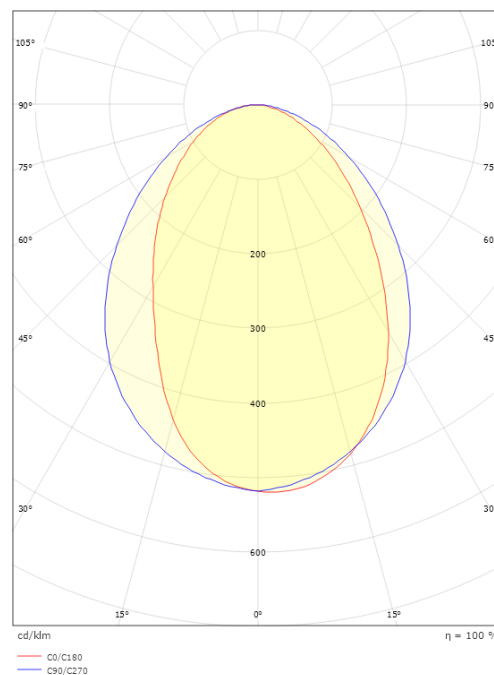

7 0 2 1 9 8 6 1 1 3 9 7 6