

SG Hovden Graphite Midi 1060lm 3000K Ra>80 Trailing edge dimming

Article code: 630004
 EAN: 7021986300048



Electrical

System wattage: 12W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 47, B16: 67, C10: 47, C16: 67

Light technic

Type of light source: LED
 Luminous flux: 1060lm
 Efficacy: 88 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>50,000
 Light distribution: Direct
 Optic: Lens
 Beam angle: 15°
 Visible flicker (PstLM):
 Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I

Energy and approvals

Contains light source of energy class: F
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
 Cable: Cable 2m
 Connection: Includes cable and plug

Dimensions

Length (mm) L: 100
 Width (mm) W: 61
 Height (mm) H: 116
 Weight (kg) gross/net: 0.969 / 0.881

Packaging

Packing dimensions (mm): 160 x 120 x 80

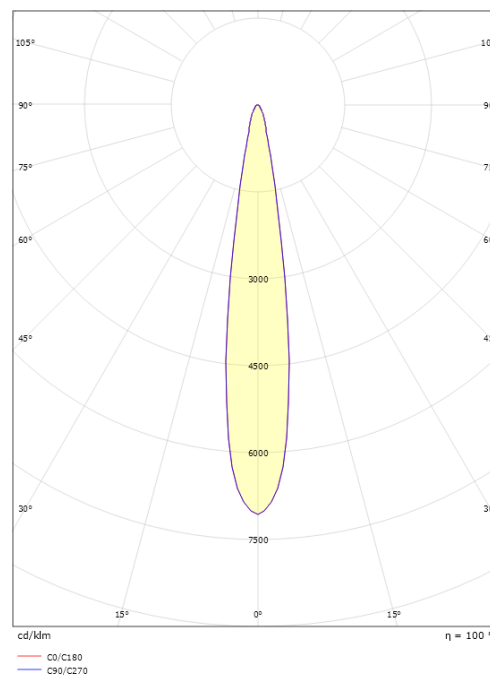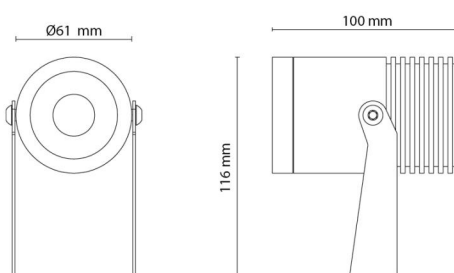

7 0 2 1 9 8 6 3 0 0 4 8