

## SG Hovden Graphite Midi 1140lm 3000K Ra>80 Trailing edge dimming

Article code: 630005  
 EAN: 7021986300055



### Electrical

System wattage: 12W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 47, B16: 67, C10: 47, C16: 67

### Light technic

Type of light source: LED  
 Luminous flux: 1140lm  
 Efficacy: 95 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B20>50,000  
 Light distribution: Direct  
 Optic: Lens  
 Beam angle: 36°  
 Visible flicker (PstLM):  
 Stroboscopic flicker (SVM): 0.01

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class I

### Energy and approvals

Contains light source of energy class: F  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

### Materials and finish

Housing: Aluminium  
 Colour: Graphite  
 Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Outdoor  
 Cable: Cable 2m  
 Connection: Includes cable and plug

### Dimensions

Length (mm) L: 100  
 Width (mm) W: 61  
 Height (mm) H: 116  
 Weight (kg) gross/net: 0.969 / 0.881

### Packaging

Packing dimensions (mm): 160 x 120 x 80

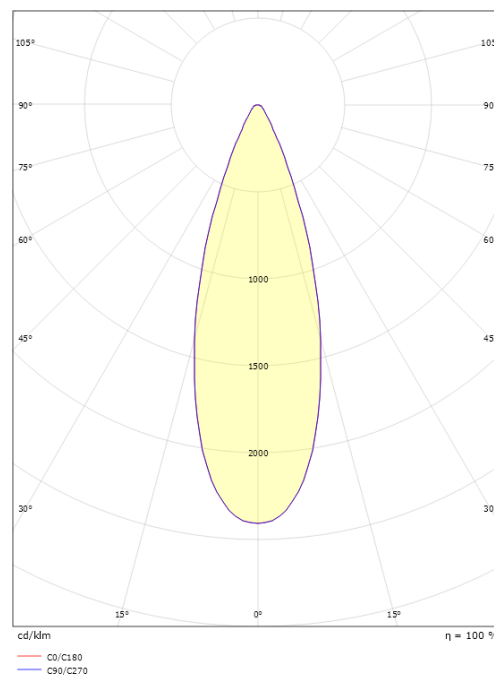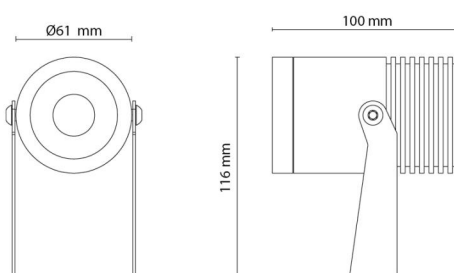

7 0 2 1 9 8 6 3 0 0 5 5