

SG Hovden Graphite Micro 250lm 3000K Ra>80 Trailing edge dimming

Article code: 630048
EAN: 7021986300482



Electrical

System wattage: 4W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 69, B16: 98, C10: 69, C16: 98

Light technic

Type of light source: LED
Luminous flux: 250lm
Efficacy: 63 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L70/B10>100,000
Light distribution: Direct
Optic: Lens
Beam angle: 36°
Visible flicker (PstLM): 0
ULOR (Yes, up to 43° tilt angle

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP67

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Aluminium
Colour: Graphite
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
Cable: Cable 2m
Connection: Includes cable and plug

Dimensions

Length (mm) L: 82
Width (mm) W: 36
Height (mm) H: 85
Weight (kg) gross/net: 0.528 / 0.48

Packaging

Packing dimensions (mm): 150 x 120 x 60

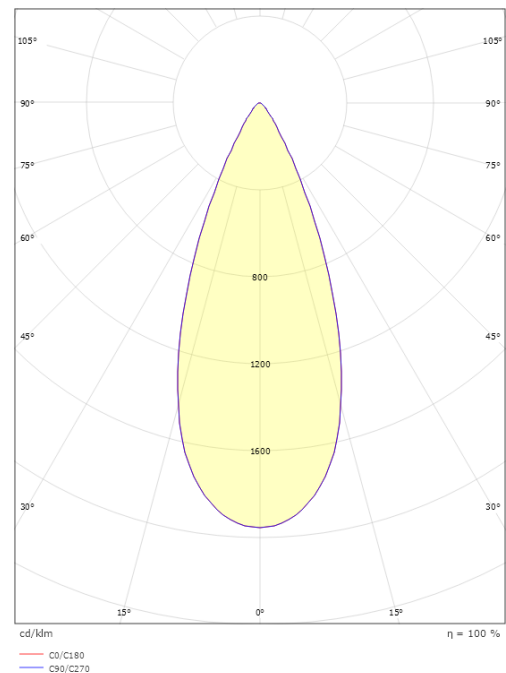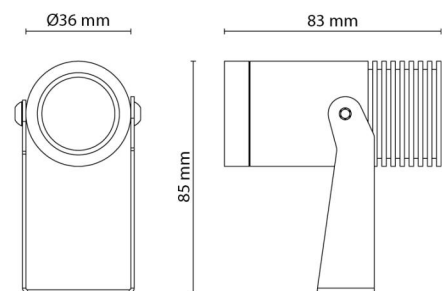

7 0 2 1 9 8 6 3 0 0 4 8 2