

SG Hovden Graphite Micro 230lm 2700K Ra>80 Trailing edge dimming

Article code: 630062
 EAN: 7021986300628
 Replaces: 614001



Electrical

System wattage: 4W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 69, B16: 98, C10: 69, C16: 98

Light technic

Type of light source: LED
 Luminous flux: 230lm
 Efficacy: 58 lm/W
 Colour temperature: 2700K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L70/B10>100,000
 Light distribution: Direct
 Optic: Lens
 Beam angle: 36°
 Visible flicker (PstLM): 0
 ULOR (Yes, up to 43° tilt angle

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I
 IK Class: IK10
 IP Class: IP67

Energy and approvals

Contains light source of energy class: E
 Breeam: Fulfils Hea 01 for flicker free lighting
 BVB: Yes

Materials and finish

Housing: Aluminium
 Colour: Graphite
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Surface, Outdoor
 Cable: Cable 2m
 Connection: Includes cable and plug

Dimensions

Length (mm) L: 82
 Width (mm) W: 36
 Height (mm) H: 85
 Weight (kg) gross/net: 0.528 / 0.48

Packaging

Packing dimensions (mm): 150 x 120 x 60

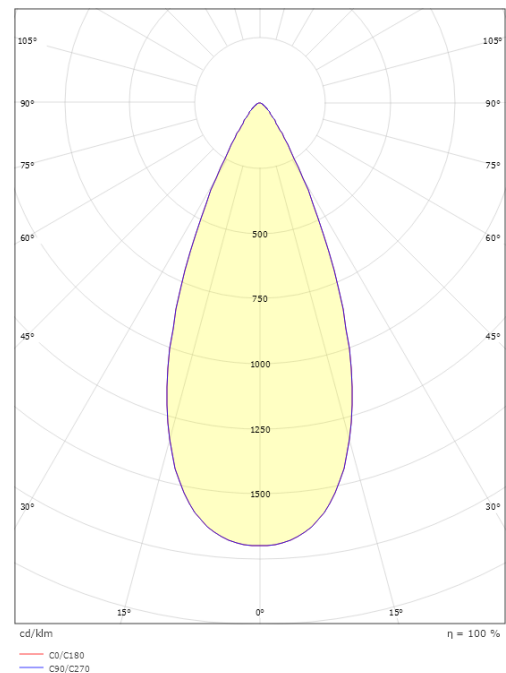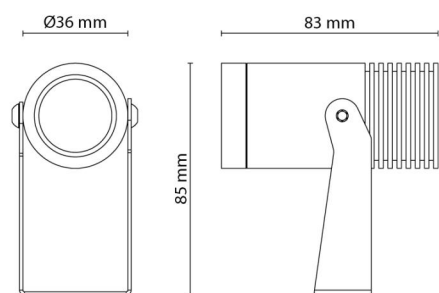

7 0 2 1 9 8 6 3 0 0 6 2 8