

## Inspire S 300 White 980lm 4000K Ra 98 Trailing edge dimming

Article code: 320828  
EAN: 7021983208286



### Electrical

System wattage: 15W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 32, B16: 50, C10: 52, C16: 85

### Light technic

Type of light source: LED  
Luminous flux: 980lm  
Efficacy: 65 lm/W  
Colour temperature: 4000K  
Colour rendering (CRI): Ra 98  
MacAdams factor: SDCM: 2  
Lifetime: L90/B10>100,000  
Light distribution: Direct  
Beam angle: 55°  
Visible flicker (PstLM): 0.1  
Stroboscopic flicker (SVM): 0.03

### Control/Dimming

Type: Trailing edge dimming  
Driver: 400mA

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)

### Mounting/Connection


Mounting: Indoor  
Module: 300  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 300  
Width (mm) W: 59  
Height (mm) H: 85  
Weight (kg) gross/net: 1.089 / 0.988

### Packaging

Packing dimensions (mm): 310 x 93 x 69

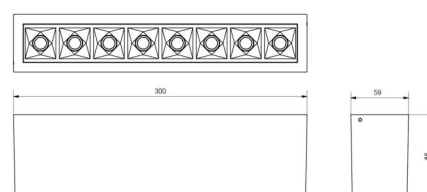

7 0 2 1 9 8 3 2 0 8 2 8 6