

Junistar ECO Isosafe



Junistar ECO Isosafe White DimToWarm 510lm 2000-2800K Ra>95 Trailing edge dimming

Article code: 905215
EAN: 7021989052159



Electrical

Wattage: 6W
System wattage: 7W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED
Luminous flux: 510lm
Efficacy: 73 lm/W
Colour temperature: 2000-2800K
Colour rendering (CRI): Ra>95
MacAdams factor: SDCM: 3
Lifetime: L90/B10>50,000
Light distribution: Direct
Optic: Reflector
Beam angle: 42°
UGR: UGR<22

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV
IP Class: IP44

Energy and approvals

Contains light source of energy class: F
Breeam: Fulfills Hea 01 for flicker free lighting
Passed 60-minute fire resistance test in accordance with BS 5832:2015: Yes
Second evaluation test passed according to EN ISO 10140-2:2021 and 10140-3:2021 part E: Yes

Materials and finish

Housing: Aluminium
Colour: White (RAL 9003)
Optics: Tempered glass

Mounting/Connection



Mounting: Recessed, Indoor
Connection: Screwless terminal block

Dimensions

Height (mm) H: 40
Diameter (mm) D: 90
Cut-out (mm): 83
Weight (kg) gross/net: 0.361 / 0.361

Packaging

Packing dimensions (mm): 122 x 121 x 95
Number per pack: 8

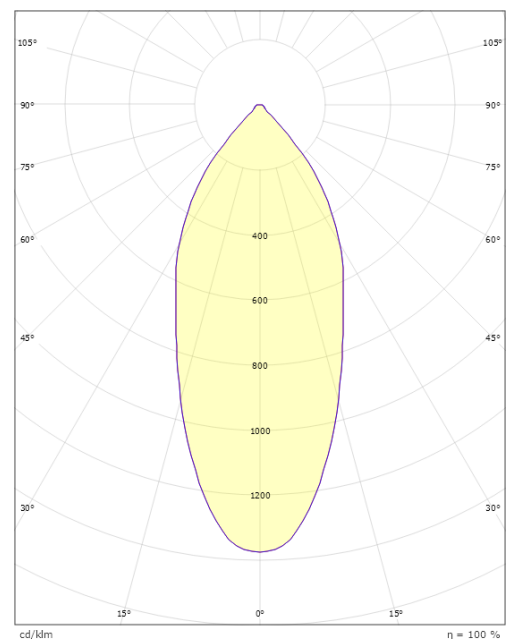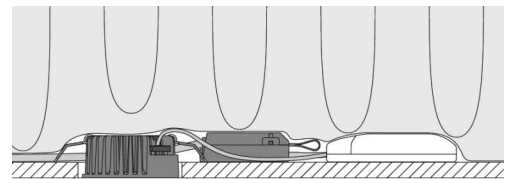

cd/km
C0/C180
C90/C270



7 0 2 1 9 8 9 0 5 2 1 5 9