

Junistar Lux IsoSafe



Junistar Lux IsoSafe Black 590lm 3000K Ra 98 Trailing edge dimming

Article code: 902525
 EAN: 7021989025252
 Replaces: 901303



Electrical

Wattage: 7W
 System wattage: 8W
 Voltage: 220-240V
 Frequency (Hz): 50/60Hz
 Max. luminaires per circuit breaker: B10: 105, B16: 168, C10: 105, C16: 168

Light technic

Type of light source: LED
 Luminous flux: 590lm
 Efficacy: 74 lm/W
 Colour temperature: 3000K
 Colour rendering (CRI): Ra 98
 MacAdams factor: SDCM: 1
 Lifetime: L90/B10>100,000
 Light distribution: Direct
 Optic: Reflector
 Beam angle: 42°
 UGR: UGR<22

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV
 IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: F
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: Black (RAL 9004)
 Optics: Tempered glass

Mounting/Connection




Mounting: Recessed, Indoor / Outdoor
 Connection: Screwless terminal block

Dimensions

Height (mm) H: 56
 Diameter (mm) D: 94
 Cut-out (mm): 83
 Ceiling void depth (mm): 54
 Weight (kg) gross/net: 0.415 / 0.349

Packaging

Packing dimensions (mm): 130 x 115 x 75

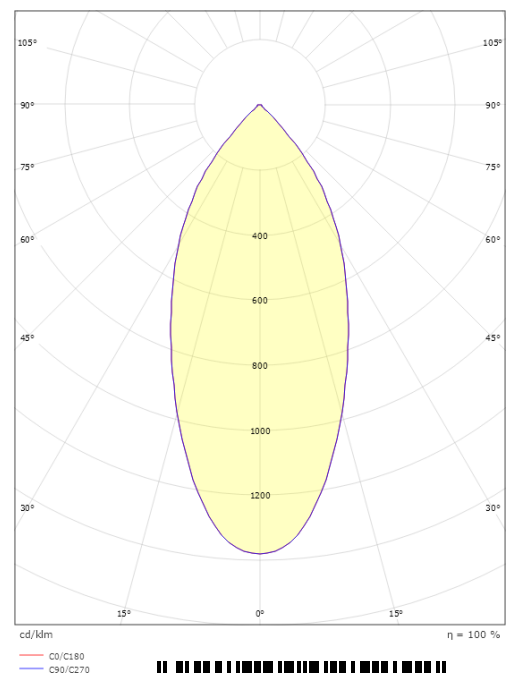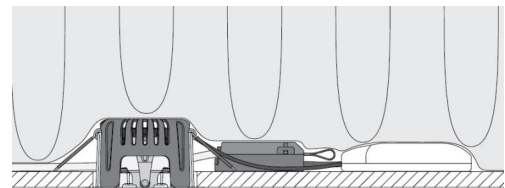

7 0 2 1 9 8 9 0 2 5 2 5 2