

Lineal recessed 840 White 1450lm 4000K Ra>80 DALI / Push Dim

Article code: 8246095651
 EAN: 5703821180160



Electrical

System wattage: 13W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 15, B16: 24, C10: 24, C16: 38

Light technic

Type of light source: LED
 Luminous flux: 1450lm
 Efficacy: 112 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B10>100,000
 Lifetime: L93/>50,000
 Light distribution: Direct
 UGR: UGR<28
 Photobiological safety: RG 0

Control/Dimming

Type: DALI / Push Dim

Protection

Luminaire class: Class I

Energy and approvals

Contains light source of energy class: C
 Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
 Colour: White (RAL 9003)

Mounting/Connection



Mounting: Recessed, Indoor
 Module: 840
 Connection: 5-pole Winsta mini with 5x2,5mm² through wiring

Dimensions

Length (mm) L: 841
 Width (mm) W: 62
 Height (mm) H: 62
 Weight (kg) gross/net: 1.9 / 1.7

Packaging

Packing dimensions (mm): 945 x 71 x 64

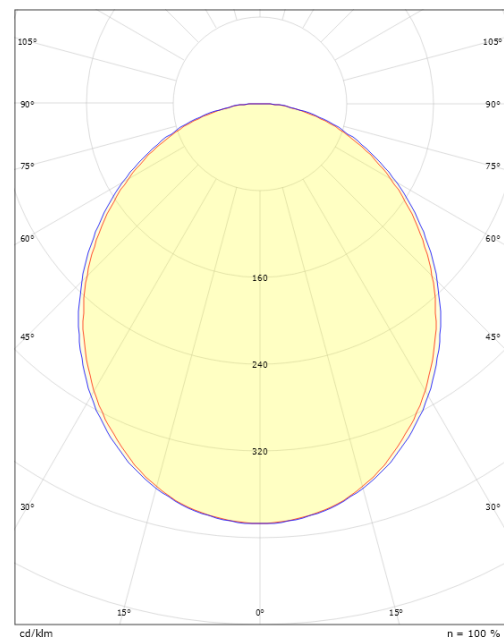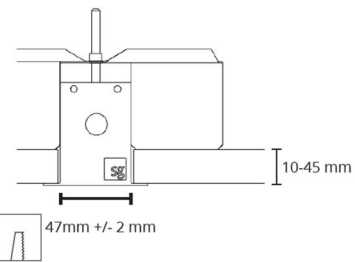

cd/km
 — C0/C180
 — C90/C270

η = 100 %



5 7 0 3 8 2 1 1 8 0 1 6 0