

## Lineal recessed 1400 White 2320lm 3000K Ra>80 DALI / Push Dim

Article code: 8246095677  
 EAN: 5703821180184



### Electrical

System wattage: 21W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 33

### Light technic

Type of light source: LED  
 Luminous flux: 2320lm  
 Efficacy: 110 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L80/B10>100,000  
 Lifetime: L93/>50,000  
 Light distribution: Direct  
 UGR: UGR<28  
 Photobiological safety: RG 0

### Control/Dimming

Type: DALI / Push Dim

### Protection

Luminaire class: Class I

### Energy and approvals

Contains light source of energy class: C  
 Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
 Colour: White (RAL 9003)

### Mounting/Connection



Mounting: Recessed, Indoor  
 Module: 1400  
 Connection: 5-pole Winsta mini with 5x2,5mm<sup>2</sup> through wiring

### Dimensions

Length (mm) L: 1401  
 Width (mm) W: 62  
 Height (mm) H: 62  
 Weight (kg) gross/net: 2.9 / 2.6

### Packaging

Packing dimensions (mm): 1505 x 71 x 64

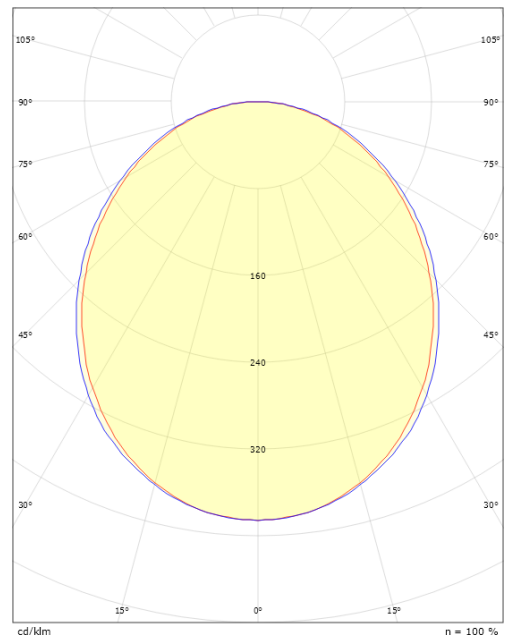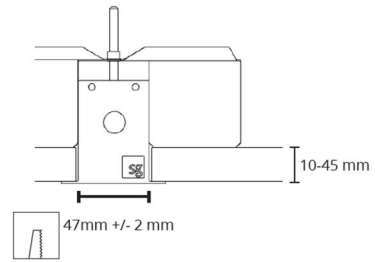

cd/klm  
 — C0/C180  
 — C90/C270



5 7 0 3 8 2 1 1 8 0 1 8 4