

## Linus LED White 1890lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 8246078788  
EAN: 5703821162708



### Electrical

System wattage: 14W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 13, B16: 20, C10: 21, C16: 34  
Leakage current (mA): 0,07

### Light technic

Type of light source: LED  
Light source included: Yes  
Luminous flux: 1890lm  
Efficacy: 135 lm/W  
Colour temperature: 4000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L90/B10>70,000  
Lifetime: L94>50,000  
Minimum ambient temperature: -25°C  
Light distribution: Direct/Indirect 97/3%  
Optic: Lens C, prismatic Conical  
Visible flicker (PstLM): 0,16  
Stroboscopic flicker (SVM): 0

### Control/Dimming

Type: DALI-2 / Push Dim

### Protection

Luminaire class: Class I  
IP Class: IP20

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes

### Materials and finish

Housing: Sheet steel  
Colour: White (Pure white, 25% gloss)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Length (mm) L: 1170  
Width (mm) W: 123  
Height (mm) H: 90  
Weight (kg) gross/net: 4.3 / 4.1

### Packaging

Packing dimensions (mm): 1260 x 160 x 100

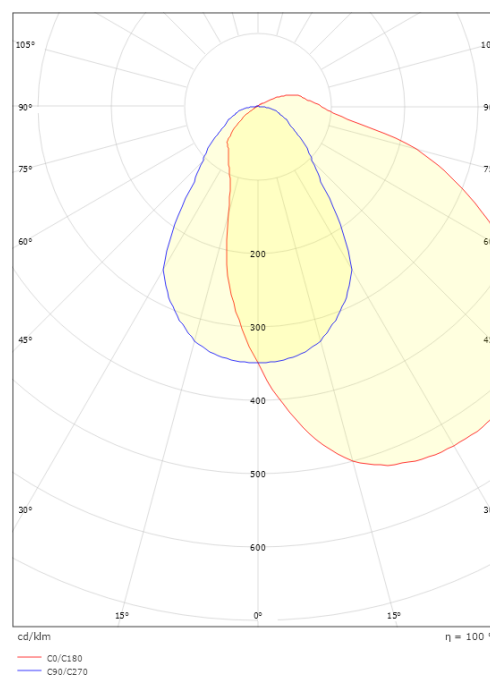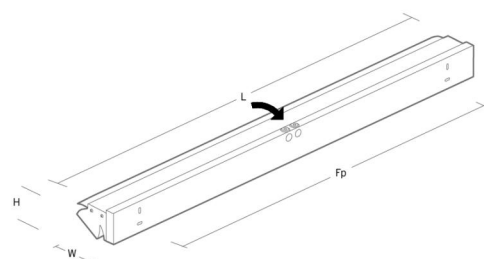

5 7 0 3 8 2 1 1 6 2 7 0 8