

Nemo II



Nemo II Midi 460lm 3000K Ra>80 Trailing edge dimming

Article code: 630072
EAN: 7021986300727



Electrical

System wattage: 9W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 60, B16: 96, C10: 60, C16: 96

Light technic

Type of light source: LED
Luminous flux: 460lm
Efficacy: 51 lm/W
Colour temperature: 3000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>50,000
Light distribution: Direct
Optic: Lens
Beam angle: 32°
Visible flicker (PstLM): 0
Stroboscopic flicker (SVM): 0.01

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class I
IK Class: IK10
IP Class: IP67
Max load: 750 kg

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium and stainless steel
Optics: Glass

Mounting/Connection



Mounting: Recessed, Indoor / Outdoor
Cable: Cable 1m

Dimensions

Height (mm) H: 110
Diameter (mm) D: 130
Cut-out (mm): 118
Weight (kg) gross/net: 1.43 / 1.3

Packaging

Packing dimensions (mm): 140 x 140 x 125

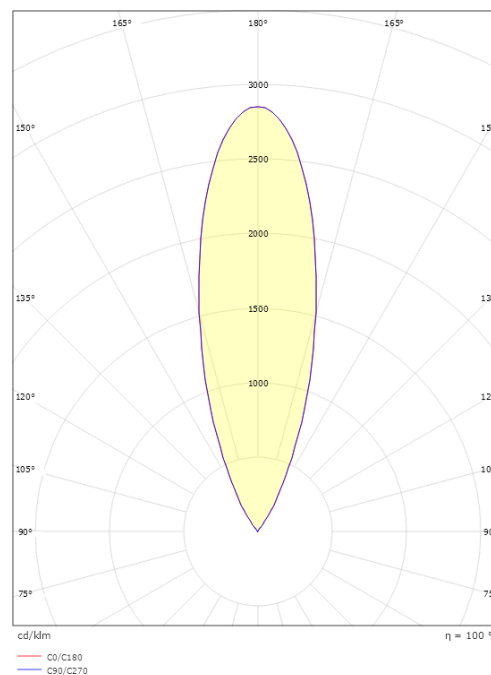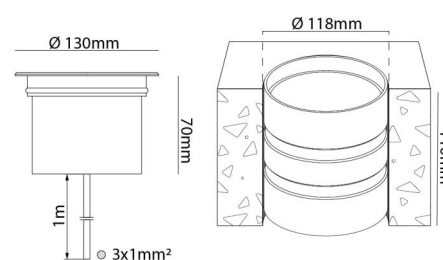

7 0 2 1 9 8 6 3 0 0 7 2 7