

# Prelude Square



## Prelude Square White w/ outlet 1700lm 4000K Ra>90 PIR Sensor

Article code: 111387  
EAN: 7021981113872



### Electrical

System wattage: 13W  
Voltage: 220-240V  
Max. luminaires per circuit breaker: B10: 19, B16: 30, C10: 31, C16: 51

### Light technic

Type of light source: LED  
Luminous flux: 1700lm  
Efficacy: 131 lm/W  
Colour temperature: 4000K  
Colour rendering (CRI): Ra>90  
MacAdams factor: SDCM: 3  
Lifetime: L80/B10>100,000  
Light distribution: Direct  
Optic: Acrylic diffuser

### Control/Dimming

Type: PIR Sensor

### Protection

Luminaire class: Class I  
IK Class: IK05  
IP Class: IP44 (mounted horizontally) / IP20 (mounted vertically)

### Energy and approvals

Contains light source of energy class: C  
Breeam: Fulfils Hea 01 for flicker free lighting

### Materials and finish

Housing: Aluminium  
Colour: White (RAL 9003)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Surface, Indoor  
Connection: Screwless terminal block

### Dimensions

Width (mm) W: 686  
Height (mm) H: 59  
Depth (D): 62  
Weight (kg) gross/net: 1.402 / 1.256

### Packaging

Packing dimensions (mm): 695 x 77 x 65

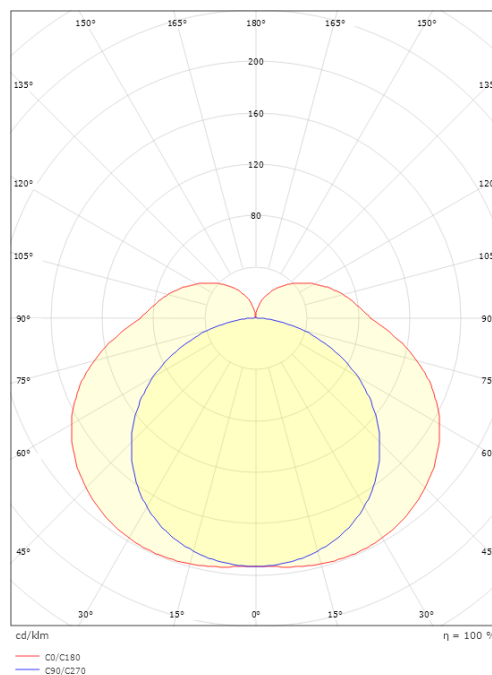

7 0 2 1 9 8 1 1 1 3 8 7 2