

**Primo 1100 Graphite 740lm 3000K Ra>80 Trailing edge dimming**

Article code: 643570  
 EAN: 7021986435702

**Electrical**

System wattage: 10W  
 Voltage: 220-240V  
 Max. luminaires per circuit breaker: B10: 33, B16: 52, C10: 40, C16: 64

**Light technic**

Type of light source: LED  
 Luminous flux: 740lm  
 Efficacy: 74 lm/W  
 Colour temperature: 3000K  
 Colour rendering (CRI): Ra>80  
 MacAdams factor: SDCM: 3  
 Lifetime: L70/B50>50,000  
 Light distribution: Direct  
 Optic: Opal  
 Beam angle: 120°  
 Photobiological safety: RG 0

**Control/Dimming**

Type: Trailing edge dimming

**Protection**

Luminaire class: Class II  
 Fire protection class: 850°C - 30s

**Energy and approvals**

Contains light source of energy class: E  
 Breeam: Fulfils Hea 01 for flicker free lighting  
 BVB: Yes

**Materials and finish**

Housing: Aluminium  
 Colour: Graphite  
 Optics: UV-stabilized polycarbonate

**Mounting/Connection**



Mounting: Surface, Indoor / Outdoor  
 Module: 1100  
 Connection: Screwless terminal block

**Dimensions**

Height (mm) H: 120  
 Diameter (mm) D: 270  
 Depth (D): 120  
 Weight (kg) gross/net: 1.95 / 1.74

**Packaging**

Packing dimensions (mm): 270 x 270 x 120

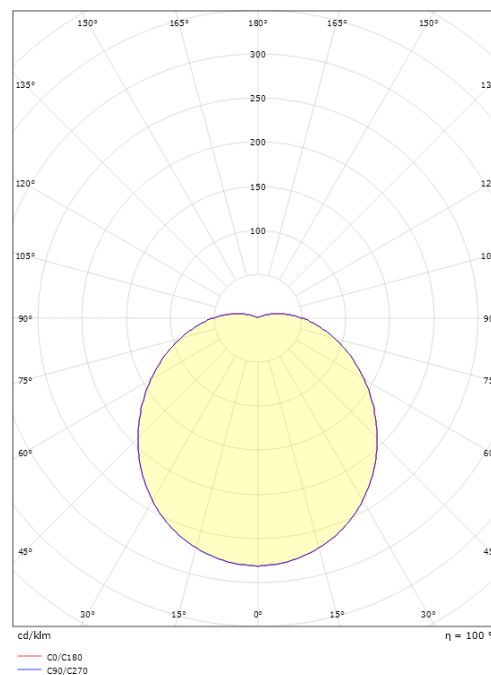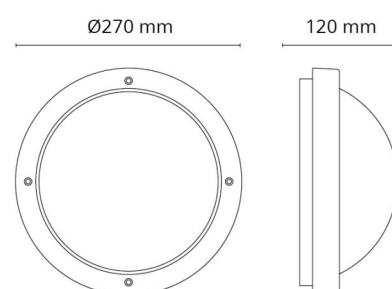

7 0 2 1 9 8 6 4 3 5 7 0 2