

## Rax ECO 150 White 3000/4000K Ra>80 Trailing edge dimming

Article code: 212568  
EAN: 7021982125683



### Electrical

Wattage: 8W/17W  
Voltage: 220-240V  
Frequency (Hz): 50/60Hz  
Max. luminaires per circuit breaker: B10: 30, B16: 47, C10: 50, C16: 80

### Light technic

Type of light source: LED  
Luminous flux: 880lm/930lm/1790lm/1900lm  
Efficacy: 110/116/105/112lm/W  
Colour temperature: 3000/4000K  
Colour rendering (CRI): Ra>80  
MacAdams factor: SDCM: 3  
Lifetime: L80/B20>50,000  
Light distribution: Direct  
Optic: Reflector  
Beam angle: 89°  
UGR: UGR<22  
Visible flicker (PstLM): 0.02  
Stroboscopic flicker (SVM): 0.01  
Photobiological safety: RG 1

### Control/Dimming

Type: Trailing edge dimming

### Protection

Luminaire class: Class II

### Energy and approvals

Contains light source of energy class: E  
Breeam: Fulfils Hea 01 for flicker free lighting  
BVB: Yes

### Materials and finish

Housing: Polycarbonat (PC)  
Colour: White (RAL 9003)  
Optics: Acrylic (PMMA)

### Mounting/Connection



Mounting: Indoor  
Connection: 3 pol Linect / screwless terminal block

### Dimensions

Height (mm) H: 83  
Diameter (mm) D: 166  
Cut-out (mm): 150  
Ceiling void depth (mm): 83  
Weight (kg) gross/net: 0.72 / 0.618

### Packaging

Packing dimensions (mm): 189 x 172 x 94

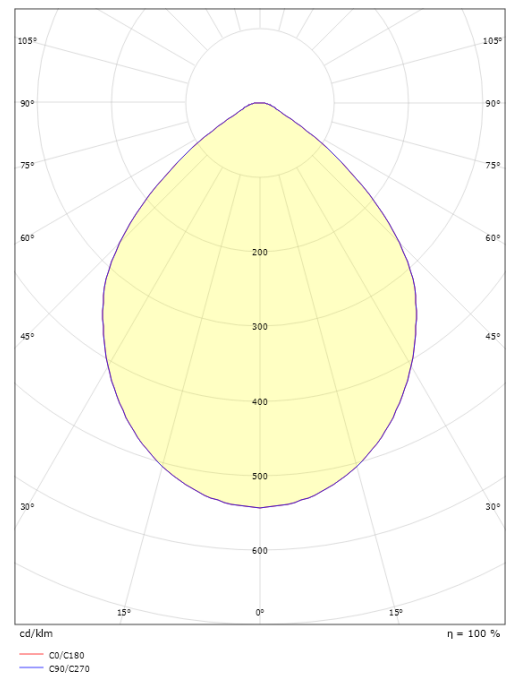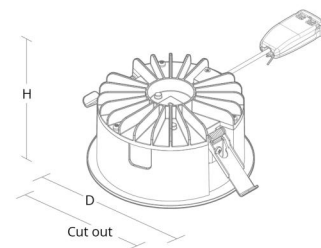

7 0 2 1 9 8 2 1 2 5 6 8 3