

Rax Soft 200



Rax Soft 200 Satin TW LEDDim 2700-6500K Ra>80 Tunable White LEDDim

Article code: 212576
EAN: 7021982125768



Electrical

System wattage: 28W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 20, B16: 32, C10: 20, C16: 32

Light technic

Type of light source: LED
Luminous flux: 2610lm (@6500K)
Emergency lumen: EM 280lm
Efficacy: 93 lm/W
Colour temperature: 2700-6500K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L90/B10>100,000
Light distribution: Direct
Optic: Satin Matt Reflector
Beam angle: 62°
Photobiological safety: RG 1



Control/Dimming

Type: Tunable White LEDDim

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP44/IP20

Energy and approvals

Contains light source of energy class: E
Breeam: Fulfils Hea 01 for flicker free lighting
BVB: Yes

Materials and finish

Housing: Flame retardant polycarbonate
Colour: White/Satin mat
Optics: Polycarbonat (PC)

Mounting/Connection


Mounting: Recessed, Indoor
Connection: 3 pol Linect / screwless terminal block

Dimensions

Height (mm) H: 93
Diameter (mm) D: 216
Cut-out (mm): 200
Ceiling void depth (mm): 90
Weight (kg) gross/net: 1.2 / 1

Packaging

Packing dimensions (mm): 240 x 240 x 102

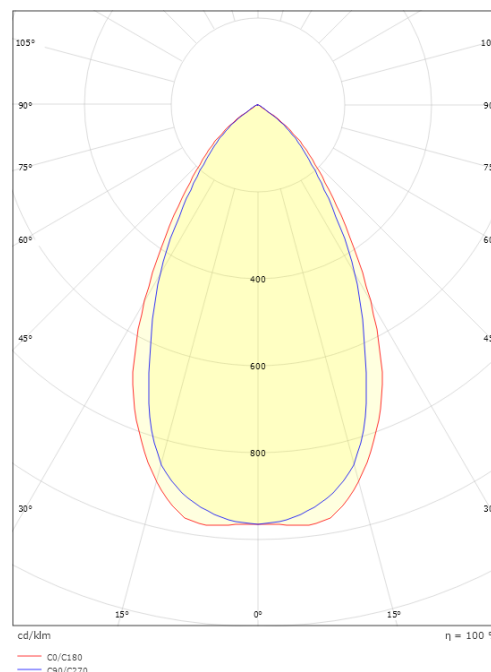

7 0 2 1 9 8 2 1 2 5 7 6 8