

Sense 300X300



Sense 300X300 White 2350lm 4000K Ra>80 DALI-2 / Push Dim

Article code: 212274
EAN: 7021982122743



Electrical

System wattage: 26W
Voltage: 220-240V
Max. luminaires per circuit breaker: B10: 35, B16: 55, C10: 57, C16: 92

Light technic

Type of light source: LED
Luminous flux: 2350lm
Efficacy: 90 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Lifetime: L90>50,000
Light distribution: Direct
Optic: Opal
Photobiological safety: RG 0

Control/Dimming

Type: DALI-2 / Push Dim

Protection

Luminaire class: Class II SELV
IK Class: IK08
IP Class: IP40/IP20

Energy and approvals

Contains light source of energy class: D
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Aluminium
Colour: White smooth (Ral 9016 gloss 30)
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 300
Width (mm) W: 300
Height (mm) H: 25
Cut-out (mm): 285
Ceiling void depth (mm): 29
Weight (kg) gross/net: 3.434 / 2.834

Packaging

Packing dimensions (mm): 345 x 310 x 65

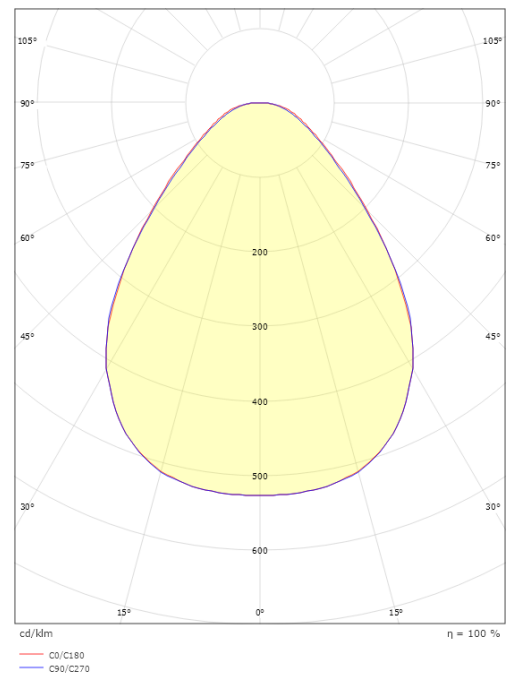

7 0 2 1 9 8 2 1 2 2 7 4 3