

Sense Basic 600x600 White Incl driver 4040lm 4000K Ra>80 DALI / Push Dim

Article code: 212188
 EAN: 7021982121883



Electrical

System wattage: 31W
 Voltage: 220-240V
 Max. luminaires per circuit breaker: B10: 31, B16: 50, C10: 52, C16: 85

Light technic

Type of light source: LED
 Luminous flux: 4040lm
 Efficacy: 130 lm/W
 Colour temperature: 4000K
 Colour rendering (CRI): Ra>80
 MacAdams factor: SDCM: 3
 Lifetime: L80/B20>100,000
 Light distribution: Direct
 Optic: Opalprism
 UGR: UGR<19

Control/Dimming

Type: DALI / Push Dim

Protection

Luminaire class: Class II SELV

Energy and approvals

Contains light source of energy class: C
 Bream: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Steel
 Colour: White smooth (Ral 9016 gloss 30)
 Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
 Module: 600x600
 Connection: 5 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
 Width (mm) W: 595
 Height (mm) H: 36
 Weight (kg) gross/net: 2.925 / 2.4

Packaging

Packing dimensions (mm): 700 x 685 x 57.5
 Number per pack: 4

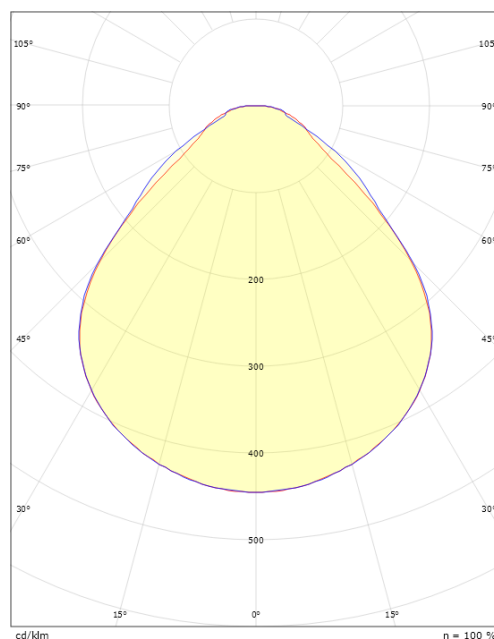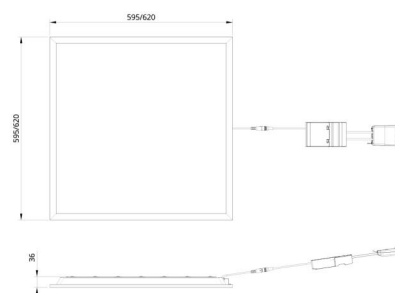

cd/klm
 — C0/C180
 — C90/C270

$\eta = 100\%$



7 0 2 1 9 8 2 1 2 1 8 8 3