

Sense Line



Sense Line 120x600 White Linect 1230lm 4000K Ra>80 Trailing edge dimming

Article code: 212692
EAN: 7021982126925



Electrical

System wattage: 9W
Voltage: 220-240V
Frequency (Hz): 50/60Hz
Max. luminaires per circuit breaker: B10: 18, B16: 30, C10: 31, C16: 51

Light technic

Type of light source: LED
Light source included: Yes
Luminous flux: 1230lm
Efficacy: 137 lm/W
Colour temperature: 4000K
Colour rendering (CRI): Ra>80
MacAdams factor: SDCM: 3
Lifetime: L80/B20>100,000
Light distribution: Direct
Optic: Opalprism
Beam angle: 84°
UGR: UGR<19
Visible flicker (PstLM): 0.1
Stroboscopic flicker (SVM): 0.07

Control/Dimming

Type: Trailing edge dimming

Protection

Luminaire class: Class II SELV
IP Class: IP20

Energy and approvals

Contains light source of energy class: B
Breeam: Fulfils Hea 01 for flicker free lighting

Materials and finish

Housing: Sheet steel
Colour: White
Optics: Acrylic (PMMA)

Mounting/Connection



Mounting: Recessed, Indoor
Module: 120x600
Connection: 3 pol Linect / screwless terminal block

Dimensions

Length (mm) L: 595
Width (mm) W: 118
Height (mm) H: 35
Ceiling void depth (mm): 35
Weight (kg) gross/net: 1.1 / 0.9

Packaging

Packing dimensions (mm): 750 x 135 x 54

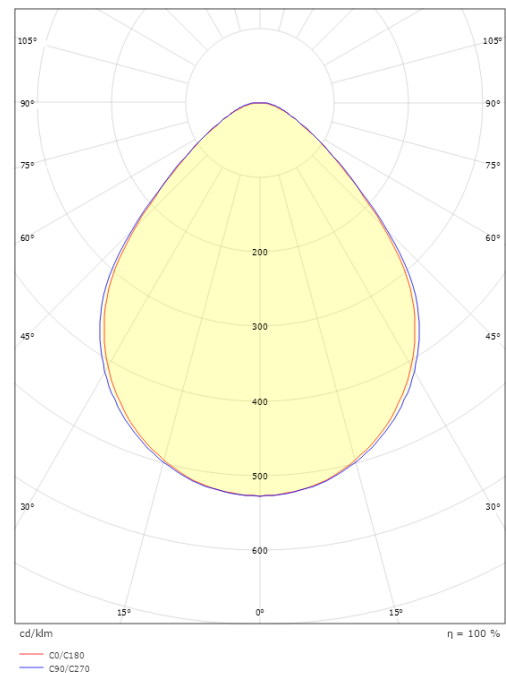

7 0 2 1 9 8 2 1 2 6 9 2 5